


IE3(GB2) 超高效三相异步电动机

PREMIUM EFFICIENCY THREE-PHASE ASYNCHRONOUS MOTOR




IE3(GB2级)代号说明 IE3 DESIGNATION

JM3 200L-2

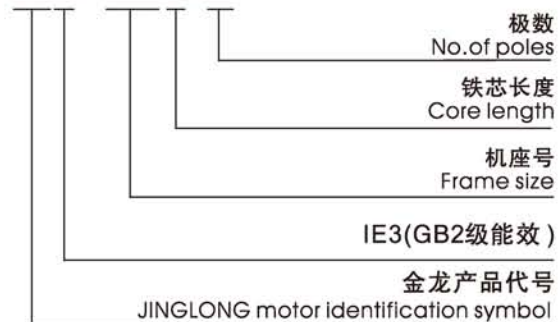

JL3 112M-4

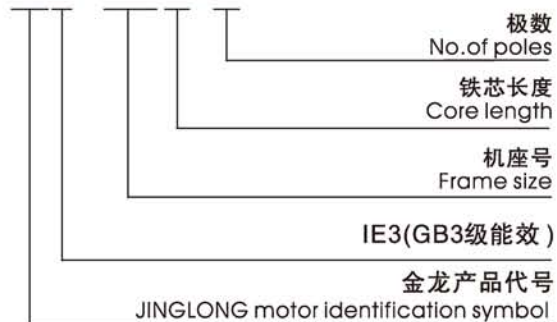


防护等级 PROTECTION DEGREE

IP- 5 5



冷却方式 COOLING METHOD

IC- 411

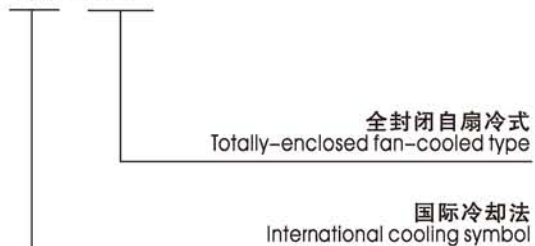

IE3 (GB2)

JM3 IE3(2级能效 GB2)技术参数 TECHNICAL DATA

SPEED 3000RPM 2-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos \Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JM3-711-2	0.37	0.5	2750	73.8	73.8	72.3	0.81	0.94	0.89	0.86	1.28	2.2	2.2	6.1	11
JM3-712-2	0.55	0.75	2750	77.8	77.8	76.2	0.82	1.31	1.24	1.20	1.91	2.3	2.3	6.1	12.1
JM3-801-2	0.75	1	2880	80.7	80.7	79.1	0.82	1.72	1.64	1.58	2.49	2.3	2.3	7.0	18.1
JM3-802-2	1.1	1.5	2880	82.7	82.7	81.0	0.83	2.43	2.31	2.23	3.65	2.2	2.3	7.3	19.5
JM3-90S-2	1.5	2	2895	84.2	84.2	82.5	0.84	3.22	3.06	2.95	4.95	2.2	2.3	7.6	23.3
JM3-90L-2	2.2	3	2895	85.9	85.9	84.2	0.85	4.58	4.35	4.19	7.26	2.2	2.3	7.6	27.1
JM3-100L-2	3	4	2895	87.1	87.1	85.4	0.87	6.02	5.71	5.51	9.90	2.2	2.3	7.8	38.8
JM3-112M-2	4	5.5	2905	88.1	88.1	86.3	0.88	7.84	7.45	7.18	13.1	2.2	2.3	8.3	48.3
JM3-132S1-2	5.5	7.5	2930	89.2	89.2	87.4	0.88	10.6	10.1	9.75	17.9	2.0	2.3	8.3	55.1
JM3-132S2-2	7.5	10	2930	90.1	90.1	88.3	0.88	14.4	13.7	13.2	24.4	2.0	2.3	7.9	69.2
JM3-160M1-2	11	15	2945	91.2	91.2	89.4	0.89	20.6	19.6	18.9	35.7	2.0	2.3	8.1	113
JM3-160M2-2	15	20	2945	91.9	91.9	90.1	0.89	27.9	26.5	25.5	48.6	2.0	2.3	8.1	123
JM3-160L-2	18.5	25	2940	92.4	92.4	90.6	0.89	34.2	32.5	31.3	60.1	2.0	2.3	8.2	142
JM3-180M-2	22	30	2955	92.7	92.7	90.8	0.89	40.5	38.5	37.1	71.1	2.0	2.3	8.2	182
JM3-200L1-2	30	40	2960	93.3	93.3	91.4	0.89	54.9	52.1	50.3	96.8	2.0	2.3	7.6	246
JM3-200L2-2	37	50	2960	93.7	93.7	91.8	0.89	67.4	64.0	61.7	119.4	2.0	2.3	7.6	265
JM3-225M-2	45	60	2965	94.0	94.0	92.1	0.90	80.8	76.8	74.0	144.9	2.0	2.3	7.7	323
JM3-250M-2	55	75	2970	94.3	94.3	92.4	0.90	98.5	93.5	90.2	176.9	2.0	2.3	7.7	413
JM3-280S-2	75	100	2975	94.7	94.7	92.8	0.90	134	127	122	240.8	1.8	2.3	7.1	546
JM3-280M-2	90	125	2975	95.0	95.0	93.1	0.90	160	152	146	288.9	1.8	2.3	7.1	569
JM3-315S-2	110	150	2978	95.2	95.2	93.3	0.90	195	185	179	352.8	1.8	2.3	7.1	897
JM3-315M-2	132	180	2978	95.4	95.4	93.5	0.90	234	222	214	423.3	1.8	2.3	7.1	1029
JM3-315L1-2	160	200	2980	95.6	95.6	93.7	0.91	279	265	256	512.8	1.8	2.3	7.2	1067
JM3-315L2-2	200	270	2980	95.8	95.8	93.9	0.91	349	331	319	640.9	1.8	2.2	7.2	1194
JM3-355M-2	250	340	2982	95.8	95.8	93.9	0.91	436	414	399	800.6	1.6	2.2	7.2	1685
JM3-355L-2	315	430	2982	95.8	95.8	93.9	0.91	549	522	503	1009	1.6	2.2	7.2	1734

JM3 IE3(2级能效 GB2)技术参数 TECHNICAL DATA

SPEED 1500RPM 4-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JM3-711-4	0.25	0.37	1340	73.5	73.5	72.0	0.74	0.70	0.66	0.64	1.78	2.1	2.2	5.2	15.2
JM3-712-4	0.37	0.5	1340	77.3	77.3	75.8	0.75	0.97	0.92	0.89	2.64	2.1	2.2	5.2	16.6
JM3-801-4	0.55	0.75	1400	80.8	80.8	79.2	0.75	1.38	1.31	1.26	3.75	2.4	2.3	5.2	17.6
JM3-802-4	0.75	1	1420	82.5	82.5	80.9	0.75	1.84	1.75	1.69	5.04	2.3	2.3	6.6	18.4
JM3-90S-4	1.1	1.5	1445	84.1	84.1	82.4	0.76	2.61	2.48	2.39	7.27	2.3	2.3	6.8	24.2
JM3-90L-4	1.5	2	1445	85.3	85.3	83.6	0.77	3.47	3.3	3.18	9.91	2.3	2.3	7.0	29.7
JM3-100L1-4	2.2	3	1450	86.7	86.7	85.0	0.81	4.76	4.52	4.36	14.6	2.3	2.3	7.6	41.5
JM3-100L2-4	3	4	1450	87.7	87.7	85.9	0.82	6.34	6.02	5.8	20.0	2.3	2.3	7.6	46
JM3-112M-4	4	5.5	1450	88.6	88.6	86.8	0.82	8.37	7.95	7.66	26.5	2.2	2.3	7.8	63.2
JM3-132S-4	5.5	7.5	1460	89.6	89.6	87.8	0.83	11.2	10.7	10.3	36.0	2.0	2.3	7.9	71.2
JM3-132M-4	7.5	10	1460	90.4	90.4	88.6	0.84	15.0	14.3	13.7	49.1	2.0	2.3	7.5	85.1
JM3-160M-4	11	15	1465	91.4	91.4	89.6	0.85	21.5	20.4	19.7	71.7	2.2	2.3	7.7	121
JM3-160L-4	15	20	1465	92.1	92.1	90.3	0.86	28.8	27.3	26.3	97.8	2.2	2.3	7.8	142
JM3-180M-4	18.5	25	1470	92.6	92.6	90.7	0.86	35.3	33.5	32.3	120.2	2.0	2.3	7.8	181
JM3-180L-4	22	30	1470	93.0	93.0	91.1	0.86	41.8	39.7	38.3	142.9	2.0	2.3	7.8	209
JM3-200L-4	30	40	1475	93.6	93.6	91.7	0.86	56.6	53.8	51.8	194.2	2.0	2.3	7.3	284
JM3-225S-4	37	50	1485	93.9	93.9	92.0	0.86	69.6	66.1	63.7	237.9	2.0	2.3	7.4	328
JM3-225M-4	45	60	1485	94.2	94.2	92.3	0.86	84.4	80.2	77.3	289.4	2.0	2.3	7.4	363
JM3-250M-4	55	75	1485	94.6	94.6	92.7	0.86	103	97.6	94.1	353.7	2.2	2.3	7.4	442
JM3-280S-4	75	100	1486	95.0	95.0	93.1	0.88	136	129	125	482.0	2.0	2.3	6.9	569
JM3-280M-4	90	125	1486	95.2	95.2	93.3	0.88	163	155	149	578.4	2.0	2.3	6.9	639
JM3-315S-4	110	150	1488	95.4	95.4	93.5	0.89	197	187	180	706.0	2.0	2.2	7.0	939
JM3-315M-4	132	180	1488	95.6	95.6	93.7	0.89	236	224	216	847.2	2.0	2.2	7.0	1033
JM3-315L1-4	160	200	1488	95.8	95.8	93.9	0.89	285	271	261	1027	2.0	2.2	7.1	1126
JM3-315L2-4	200	270	1490	96.0	96.0	94.1	0.90	352	334	322	1282	2.0	2.2	7.1	1238
JM3-355M-4	250	340	1490	96.0	96.0	94.1	0.90	440	418	403	1602	2.0	2.2	7.1	1830
JM3-355L-4	315	430	1490	96.0	96.0	94.1	0.90	554	526	507	2019	2.0	2.2	7.1	1950

JM3 IE3(2级能效 GB2)技术参数 TECHNICAL DATA

SPEED 1000RPM 6-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor COS ϕ	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JM3-711-6	0.18	0.25	855	63.9	63.9	62.6	0.66	0.65	0.62	0.59	2.01	1.9	2.0	4.0	11
JM3-712-6	0.25	0.37	855	68.6	68.6	67.2	0.68	0.81	0.77	0.75	2.79	1.9	2.0	4.0	11.5
JM3-801-6	0.37	0.5	890	73.5	73.5	72.0	0.70	1.09	1.04	1.00	3.97	1.9	2.0	4.7	15.2
JM3-802-6	0.55	0.75	890	77.2	77.2	75.7	0.72	1.50	1.43	1.38	5.90	1.9	2.1	4.7	16.6
JM3-90S-6	0.75	1	935	78.9	78.9	77.3	0.71	2.03	1.93	1.86	7.66	2.0	2.1	6.0	24.1
JM3-90L-6	1.1	1.5	945	81.0	81.0	79.4	0.73	2.83	2.69	2.59	11.1	2.0	2.1	6.0	25.7
JM3-100L-6	1.5	2	949	82.5	82.5	80.9	0.73	3.78	3.59	3.47	15.1	2.0	2.1	6.5	34.9
JM3-112M-6	2.2	3	955	84.3	84.3	82.6	0.74	5.36	5.09	4.91	22.0	2.0	2.1	6.6	54.2
JM3-132S-6	3	4	968	85.6	85.6	83.9	0.74	7.20	6.84	6.59	29.6	2.0	2.1	6.8	62.3
JM3-132M1-6	4	5.5	968	86.8	86.8	85.1	0.74	9.46	8.99	8.66	39.5	2.0	2.1	6.8	75.2
JM3-132M2-6	5.5	7.5	968	88.0	88.0	86.2	0.75	12.7	12.0	11.6	54.3	2.0	2.1	7.0	82.3
JM3-160M-6	7.5	10	970	89.1	89.1	87.3	0.79	16.2	15.4	14.8	73.8	2.0	2.1	7.0	112
JM3-160L-6	11	15	970	90.3	90.3	88.5	0.80	23.1	22.0	21.2	108.3	2.0	2.1	7.2	134
JM3-180L-6	15	20	978	91.2	91.2	89.4	0.81	30.9	29.3	28.2	146.5	2.0	2.1	7.3	197
JM3-200L1-6	18.5	25	980	91.7	91.7	89.9	0.81	37.8	35.9	34.7	180.3	2.0	2.1	7.3	234
JM3-200L2-6	22	30	980	92.2	92.2	90.4	0.81	44.8	42.5	41.0	214.4	2.0	2.1	7.4	251
JM3-225M-6	30	40	980	92.9	92.9	91.0	0.83	59.1	56.2	54.1	292.3	2.0	2.1	6.9	308
JM3-250M-6	37	50	985	93.3	93.3	91.4	0.84	71.7	68.1	65.7	358.7	2.0	2.1	7.1	383
JM3-280S-6	45	60	985	93.7	93.7	91.8	0.85	85.8	81.6	78.6	436.3	2.0	2.0	7.3	501
JM3-280M-6	55	75	985	94.1	94.1	92.2	0.86	103	98.1	94.6	533.2	2.0	2.0	7.3	573
JM3-315S-6	75	100	985	94.6	94.6	92.7	0.84	143	136	131	727.2	2.0	2.0	6.6	843
JM3-315M-6	90	125	988	94.9	94.9	93.0	0.85	170	161	155	869.9	2.0	2.0	6.7	941
JM3-315L1-6	110	150	988	95.1	95.1	93.2	0.85	207	196	189	1063	2.0	2.0	6.7	1017
JM3-315L2-6	132	180	988	95.4	95.4	93.5	0.86	244	232	224	1276	2.0	2.0	6.8	1121
JM3-355M1-6	160	200	990	95.6	95.6	93.7	0.86	296	281	271	1543	1.8	2.0	6.8	1715
JM3-355M2-6	200	270	990	95.8	95.8	93.9	0.87	365	346	334	1929	1.8	2.0	6.8	1846
JM3-355L-6	250	340	990	95.8	95.8	93.9	0.87	456	433	417	2412	1.8	2.0	6.8	2085


JM3 IE3(2级能效 GB2)技术参数 TECHNICAL DATA

SPEED 750RPM 8-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JM3-712-8	0.12	0.18	605	50.7	50.7	49.7	0.57	0.63	0.60	0.58	1.89	1.8	1.9	2.8	11
JM3-801-8	0.18	0.25	650	58.7	58.7	57.5	0.61	0.76	0.73	0.70	2.64	1.8	1.9	3.3	14.5
JM3-802-8	0.25	0.37	650	64.1	64.1	62.8	0.61	0.97	0.92	0.89	3.67	1.8	1.9	3.3	16.7
JM3-90S-8	0.37	0.5	675	69.3	69.3	67.9	0.61	1.33	1.26	1.22	5.23	1.8	1.9	4.0	28.2
JM3-90L-8	0.55	0.75	675	73.0	73.0	71.5	0.61	1.88	1.78	1.72	7.78	1.8	2.0	4.0	29.7
JM3-100L1-8	0.75	1	685	75.0	75.0	73.5	0.67	2.27	2.15	2.08	10.5	1.8	2.0	4.0	40
JM3-100L2-8	1.1	1.5	685	77.7	77.7	76.1	0.69	3.12	2.96	2.85	15.3	1.8	2.0	5.0	41.4
JM3-112M-8	1.5	2	695	79.7	79.7	78.1	0.70	4.08	3.88	3.74	20.6	1.8	2.0	5.0	57.5
JM3-132S-8	2.2	3	710	81.9	81.9	80.3	0.71	5.75	5.46	5.26	29.6	1.8	2.0	6.0	74.8
JM3-132M-8	3	4	710	83.5	83.5	81.8	0.73	7.48	7.10	6.85	40.4	1.8	2.0	6.0	89.1
JM3-160M1-8	4	5.5	725	84.8	84.8	83.1	0.73	9.82	9.33	8.99	52.7	1.9	2.0	6.0	101
JM3-160M2-8	5.5	7.5	725	86.2	86.2	84.5	0.74	13.1	12.4	12.0	72.4	1.9	2.0	6.0	126.5
JM3-160L-8	7.5	10	725	87.3	87.3	85.6	0.75	17.4	16.5	15.9	98.8	1.9	2.0	6.0	136
JM3-180L-8	11	15	735	88.6	88.6	86.8	0.75	25.2	23.9	23.0	142.9	2.0	2.0	6.5	198
JM3-200L-8	15	20	730	89.6	89.6	87.8	0.76	33.5	31.8	30.6	196.2	2.0	2.0	6.6	234
JM3-225S-8	18.5	25	730	90.1	90.1	88.3	0.76	41.0	39.0	37.6	242.0	1.9	2.0	6.6	284
JM3-225M-8	22	30	730	90.6	90.6	88.8	0.78	47.3	44.9	43.3	287.8	1.9	2.0	6.6	325
JM3-250M-8	30	40	735	91.3	91.3	89.5	0.79	63.2	60.0	57.9	389.8	1.9	2.0	6.5	425
JM3-280S-8	37	50	735	91.8	91.8	90.0	0.79	77.5	73.6	71.0	480.7	1.9	2.0	6.6	518
JM3-280M-8	45	60	735	92.2	92.2	90.4	0.79	93.9	89.2	85.9	584.7	1.9	2.0	6.6	582
JM3-315S-8	55	75	735	92.5	92.5	90.7	0.81	112	106	102	714.6	1.8	2.0	6.6	852
JM3-315M-8	75	100	735	93.1	93.1	91.2	0.81	151	144	138	974.5	1.8	2.0	6.2	952
JM3-315L1-8	90	125	735	93.4	93.4	91.5	0.82	179	170	163	1169	1.8	2.0	6.4	1040
JM3-315L2-8	110	150	735	93.7	93.7	91.8	0.82	218	207	199	1429	1.8	2.0	6.4	1056
JM3-355M1-8	132	180	740	94.0	94.0	92.1	0.82	260	247	238	1704	1.8	2.0	6.4	1784
JM3-355M2-8	160	220	740	94.3	94.3	92.4	0.82	314	299	288	2065	1.8	2.0	6.4	1941
JM3-355L-8	200	270	740	94.6	94.6	92.7	0.83	387	368	354	2581	1.8	2.0	6.4	2026

JM3 IE3(2级能效 GB2)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS-JM3


IM B3 H63-355

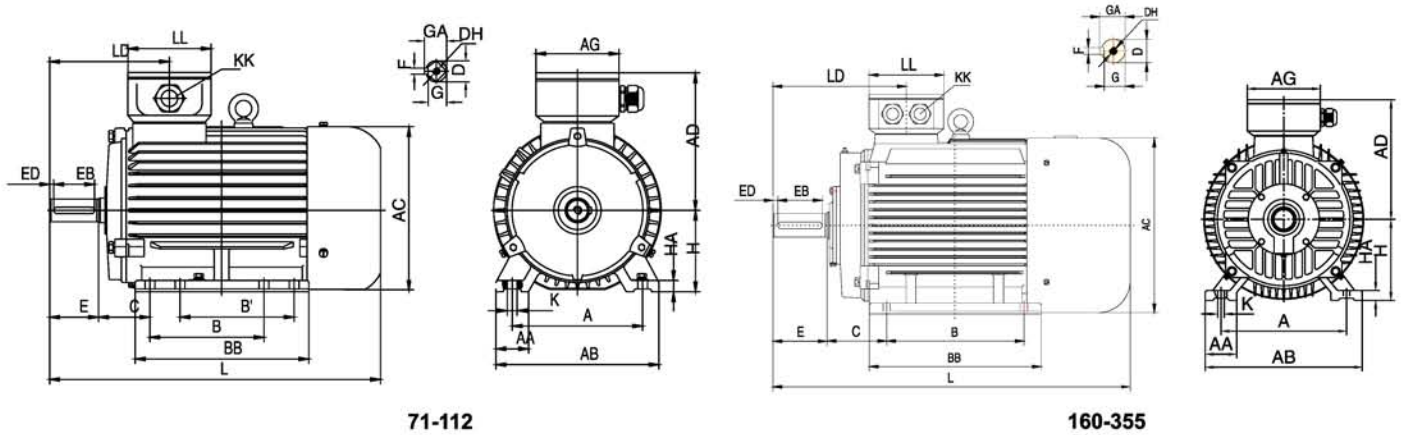

型号 TYPE	极数 POLE	A	AA	AB	AC	AD	AG	B	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LD	LL
71	2,4,6	112	32	144	136	119	94	90	120	45	14	M5X12	30	25	2.5	5	11	16	71	8	4-Φ7	1-M20X1.5	242	99	94
80	2,4,6,8	125	34	160	167	147	102	100	150	50	19	M6X16	40	30	5	6	15.5	21.5	80	10	4-Φ10	1-M25X1.5	304	119	102
90S	2,4,6,8	140	36	176	182.4	154.5	102	100	161	56	24	M8X19	50	40	5	8	20	27	90	12	4-Φ10	1-M25X1.5	336	143	102
90L	2,4,6,8	140	36	176	182.4	154.5	102	125	186	56	24	M8X19	50	40	5	8	20	27	90	12	4-Φ10	1-M25X1.5	361	143	102
100L	2,4,6,8	160	40	200	205.4	166	102	140	213	63	28	M10X22	60	50	5	8	24	31	100	14	4-Φ12	1-M32X1.5	406	147	102
112M	2,4,6,8	190	50	240	230	188	118	140	188	70	28	M10X22	60	50	5	8	24	31	112	15	4-Φ12	2-M32X1.5	394	147	110
132S	2,4,6,8	216	55	262	258.4	203	118	140	186	89	38	M12X28	80	65	7.5	10	33	41	132	18	4-Φ12	2-M32X1.5	438	172	110
132M	4,6,8	216	55	262	258.4	203	118	178	224	89	38	M12X28	80	65	7.5	10	33	41	132	18	4-Φ12	2-M32X1.5	476	172	110
160M	2,4,6,8	254	65	314	314	251	162	210	260	108	42	M16X36	110	90	10	12	37	45	160	20	4-Φ14.5	2-M40X1.5	608	256	152
160L	2,4,6,8	254	65	314	314	251	162	254	304	108	42	M16X36	110	90	10	12	37	45	160	20	4-Φ14.5	2-M40X1.5	652	256	152
180M	2,4,8	279	70	349	355	267	162	241	311	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	4-Φ14.5	2-M40X1.5	688	271	152
180L	4,6,8	279	70	349	355	267	162	279	349	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	4-Φ14.5	2-M40X1.5	726	271	152
200L	2,4,6,8	318	70	388	397	299	210	305	369	133	55	M20X42	110	100	5	16	49	59	200	25	4-Φ18.5	2-M50X1.5	779	296	190
225S	4,8	356	75	431	446	322	210	286	368	149	60	M20X42	140	125	7.5	18	53	64	225	28	4-Φ18.5	2-M50X1.5	824	329	190
225M	2	356	75	431	446	322	210	311	393	149	55	M20X42	110	100	5	16	49	59	225	28	4-Φ18.5	2-M50X1.5	819	299	190
225M	4,6,8	356	75	431	446	322	210	311	393	149	60	M20X42	140	125	7.5	18	53	64	225	28	4-Φ18.5	2-M50X1.5	849	329	190
250M	2	406	80	484	485	358	248	349	445	168	60	M20X42	140	125	7.5	18	53	64	250	30	4-Φ24	2-M63X1.5	910	347	218
250M	4,6,8	406	80	484	485	358	248	349	445	168	65	M20X42	140	125	7.5	18	58	69	250	30	4-Φ24	2-M63X1.5	910	347	218
280S	2	457	85	542	547	387	248	368	485	190	65	M20X42	140	125	7.5	18	58	69	280	35	4-Φ24	2-M63X1.5	982	355.5	218
280S	4,6,8	457	85	542	547	387	248	368	485	190	75	M20X42	140	125	7.5	20	67.5	79.5	280	35	4-Φ24	2-M63X1.5	982	355.5	218
280M	2	457	85	542	547	387	248	419	536	190	65	M20X42	140	125	7.5	18	58	69	280	35	4-Φ24	2-M63X1.5	1033	355.5	218
280M	4,6,8	457	85	542	547	387	248	419	536	190	75	M20X42	140	125	7.5	20	67.5	79.5	280	35	4-Φ24	2-M63X1.5	1033	355.5	218
315S	2	508	120	628	620	527	320	406	570	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Φ28	2-M63X1.5	1194	397	280
315S	4,6,8,10	508	120	628	620	527	320	406	570	216	80	M20X42	170	160	5	22	71	85	315	45	4-Φ28	2-M63X1.5	1224	427	280
315M	2	508	120	628	620	527	320	457	680	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Φ28	2-M63X1.5	1304	397	280
315M	4,6,8,10	508	120	628	620	527	320	457	680	216	80	M20X42	170	160	5	22	71	85	315	45	4-Φ28	2-M63X1.5	1334	427	280
315L	2	508	120	628	620	527	320	508	680	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Φ28	2-M63X1.5	1304	397	280
315L	4,6,8,10	508	120	628	620	527	320	508	680	216	80	M20X42	170	160	5	22	71	85	315	45	4-Φ28	2-M63X1.5	1334	427	280
355M	2	610	116	726	698	642	380	560	750	254	75	M20X42	140	130	5	20	67.5	79.5	355	52	6-Φ28	2-M63X1.5	1486	414	330
355M	4,6,8,10	610	116	726	698	642	380	560	750	254	95	M24X50	170	160	5	25	86	100	355	52	6-Φ28	2-M63X1.5	1516	444	330
355L	2	610	116	726	698	642	380	630	750	254	75	M20X42	140	130	5	20	67.5	79.5	355	52	6-Φ28	2-M63X1.5	1486	414	330
355L	4,6,8,10	610	116	726	698	642	380	630	750	254	95	M24X50	170	160	5	25	86	100	355	52	6-Φ28	2-M63X1.5	1516	444	330

JM3 IE3(2级能效 GB2)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS-JM3


IM B5 H63-355

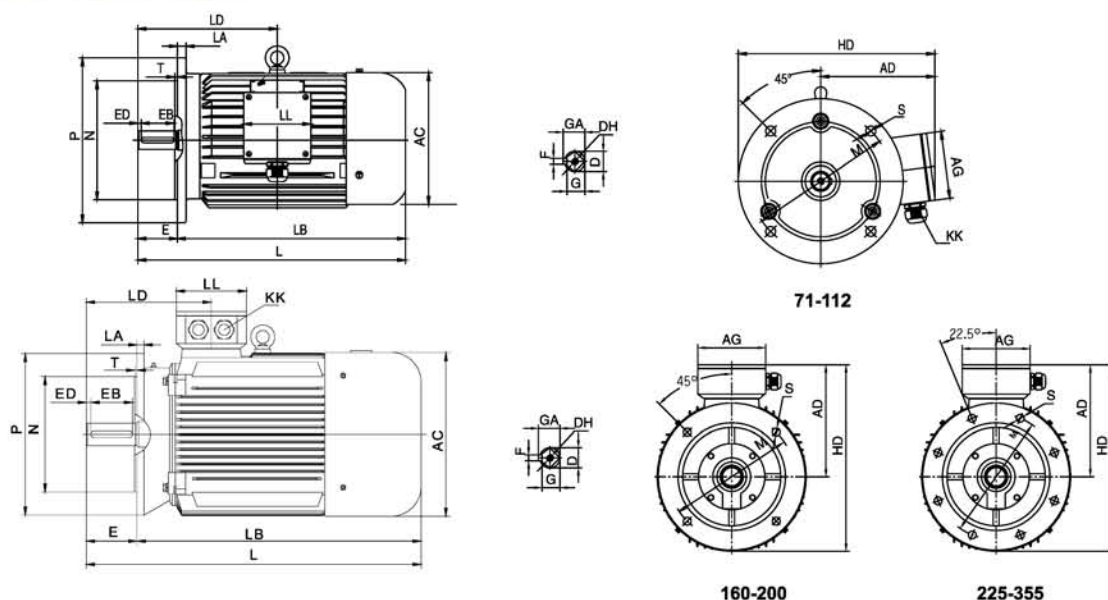

型号 TYPE	极数 POLE	AC	AD	AG	D	DH	E	EB	ED	F	G	GA	HD	KK	L	LA	LB	LD	LL	M	N	P	S	T
71	2,4,6	136	119	94	14	M5X12	30	25	2.5	5	11	16	199	1-M20X1.5	242	10	212	99	94	130	110	160	10	3.5
80	2,4,6,8	167	154.5	102	19	M6X16	40	30	5	6	15.5	21.5	254.5	1-M25X1.5	304	12	264	112	102	165	130	200	12	3.5
90S	2,4,6,8	182.4	162	102	24	M8X19	50	40	5	8	20	27	262	1-M25X1.5	336	12	286	130	102	165	130	200	12	3.5
90L	2,4,6,8	182.4	162	102	24	M8X19	50	40	5	8	20	27	262	1-M25X1.5	361	12	311	130	102	165	130	200	12	3.5
100L	2,4,6,8	205.4	173.5	102	28	M10X22	60	50	5	8	24	31	298.5	1-M32X1.5	406	13	346	139	102	215	180	250	14.5	4
112M	2,4,6,8	230	188	118	28	M10X22	60	50	5	8	24	31	315	2-M32X1.5	394	14	334	205	110	215	180	250	14.5	4
132S	2,4,6,8	258.4	203	118	38	M12X28	80	65	7.5	10	33	41	353	2-M32X1.5	438	14	390	172	110	265	230	300	14.5	4
132M	4,6,8	258.4	203	118	38	M12X28	80	65	7.5	10	33	41	353	2-M32X1.5	476	14	428	172	110	265	230	300	14.5	4
160M	2,4,6,8	314	251	162	42	M16X36	110	90	10	12	37	45	426	2-M40X1.5	608	15	498	256	152	300	250	350	18.5	5
160L	2,4,6,8	314	251	162	42	M16X36	110	90	10	12	37	45	426	2-M40X1.5	652	15	542	256	152	300	250	350	18.5	5
180M	2,4,8	355	267	162	48	M16X36	110	90	10	14	42.5	51.5	444.5	2-M40X1.5	688	15	578	271	152	300	250	350	18.5	5
180L	4,6,8	355	267	162	48	M16X36	110	90	10	14	42.5	51.5	444.5	2-M40X1.5	726	15	616	271	152	300	250	350	18.5	5
200L	2,4,6,8	397	299	210	55	M20X42	110	100	5	16	49	59	499	2-M50X1.5	779	17	669	296	190	350	300	400	18.5	5
225S	4,8	446	322	210	60	M20X42	140	125	7.5	18	53	64	547	2-M50X1.5	824	20	684	329	190	400	350	450	18.5	5
225M	2	446	322	210	55	M20X42	110	100	5	16	49	59	547	2-M50X1.5	819	20	709	299	190	400	350	450	18.5	5
225M	4,6,8	446	322	210	60	M20X42	140	125	7.5	18	53	64	547	2-M50X1.5	849	20	709	329	190	400	350	450	18.5	5
250M	2	485	358	248	60	M20X42	140	125	7.5	18	53	64	633	2-M63X1.5	910	22	770	347	218	500	450	550	18.5	5
250M	4,6,8	485	358	248	65	M20X42	140	125	7.5	18	58	69	633	2-M63X1.5	910	22	770	347	218	500	450	550	18.5	5
280S	2	547	387	248	65	M20X42	140	125	7.5	18	58	69	662	2-M63X1.5	982	22	842	355.5	218	500	450	550	18.5	5
280S	4,6,8	547	387	248	75	M20X42	140	125	7.5	20	67.5	79.5	662	2-M63X1.5	982	22	842	355.5	218	500	450	550	18.5	5
280M	2	547	387	248	65	M20X42	140	125	7.5	18	58	69	662	2-M63X1.5	1033	22	893	355.5	218	500	450	550	18.5	5
280M	4,6,8	547	387	248	75	M20X42	140	125	7.5	20	67.5	79.5	662	2-M63X1.5	1033	22	893	355.5	218	500	450	550	18.5	5
315S	2	620	527	320	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1194	22	1054	397	280	600	550	660	24	6
315S	4,6,8,10	620	527	320	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1224	22	1054	427	280	600	550	660	24	6
315M	2	620	527	320	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1304	22	1164	397	280	600	550	660	24	6
315M	4,6,8,10	620	527	320	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1334	22	1164	427	280	600	550	660	24	6
315L	2	620	527	320	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1304	22	1164	397	280	600	550	660	24	6
315L	4,6,8,10	620	527	320	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1334	22	1164	427	280	600	550	660	24	6
355M	2	698	642	380	75	M20X42	140	130	5	20	67.5	79.5	1042	2-M63X1.5	1486	25	1346	414	330	740	680	800	24	6
355M	4,6,8,10	698	642	380	95	M24X50	170	160	5	25	86	100	1042	2-M63X1.5	1516	25	1346	444	330	740	680	800	24	6
355L	2	698	642	380	75	M20X42	140	130	5	20	67.5	79.5	1042	2-M63X1.5	1486	25	1346	414	330	740	680	800	24	6
355L	4,6,8,10	698	642	380	95	M24X50	170	160	5	25	86	100	1042	2-M63X1.5	1516	25	1346	444	330	740	680	800	24	6

JM3 IE3(2级能效 GB2)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS-JM3




IM B35 H63-355

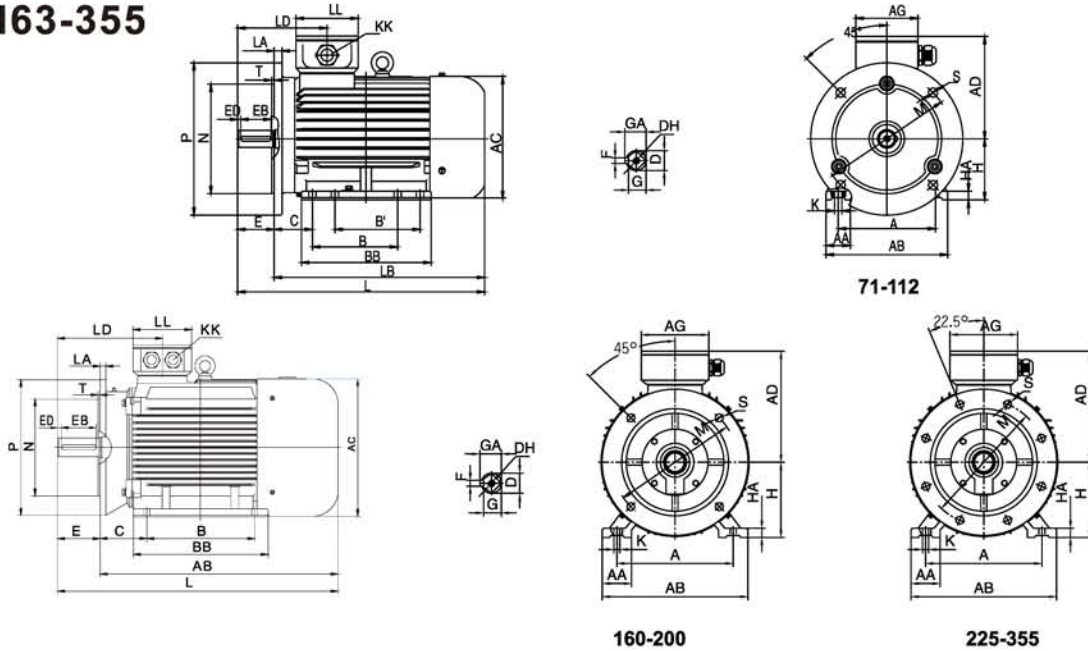


型号 TYPE	极数 POLE	A	AA	AB	AC	AD	AG	B	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LA	LB	LD	LL	M	N	P	S	T
71	2,4,6	112	32	144	136	119	94	90	120	45	14	M5X12	30	25	2.5	5	11	16	71	8	4-Ø7	1-M20X1.5	242	10	212	99	94	130	110	160	10	3.5
80	2,4,6,8	125	34	160	167	147	102	100	150	50	19	M6X16	40	30	5	6	15.5	21.5	80	10	4-Ø10	1-M25X1.5	304	12	264	112	102	165	130	200	12	3.5
90S	2,4,6,8	140	36	176	182.4	154.5	102	100	161	56	24	M8X19	50	40	5	8	20	27	90	12	4-Ø10	1-M25X1.5	336	12	286	130	102	165	130	200	12	3.5
90L	2,4,6,8	140	36	176	182.4	154.5	102	125	186	56	24	M8X19	50	40	5	8	20	27	90	12	4-Ø10	1-M25X1.5	361	12	311	130	102	165	130	200	12	3.5
100L	2,4,6,8	160	40	200	205.4	166	102	140	213	63	28	M10X22	60	50	5	8	24	31	100	14	4-Ø12	1-M32X1.5	406	13	346	139	102	215	180	250	14.5	4
112M	2,4,6,8	190	50	240	230	188	118	140	188	70	28	M10X22	60	50	5	8	24	31	112	15	4-Ø12	2-M32X1.5	394	14	334	147	110	215	180	250	14.5	4
132S	2,4,6,8	216	55	262	258.4	203	118	140	186	89	38	M12X28	80	65	7.5	10	33	41	132	18	4-Ø12	2-M32X1.5	438	14	390	172	110	265	230	300	14.5	4
132M	4,6,8	216	55	262	258.4	203	118	178	224	89	38	M12X28	80	65	7.5	10	33	41	132	18	4-Ø12	2-M32X1.5	476	14	428	172	110	265	230	300	14.5	4
160M	2,4,6,8	254	65	314	314	251	162	210	260	108	42	M16X36	110	90	10	12	37	45	160	20	4-Ø14.5	2-M40X1.5	608	15	498	256	152	300	250	350	18.5	5
160L	2,4,6,8	254	65	314	314	251	162	254	304	108	42	M16X36	110	90	10	12	37	45	160	20	4-Ø14.5	2-M40X1.5	652	15	542	256	152	300	250	350	18.5	5
180M	2,4,8	279	70	349	355	267	162	241	311	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	4-Ø14.5	2-M40X1.5	688	15	578	271	152	300	250	350	18.5	5
180L	4,6,8	279	70	349	355	267	162	279	349	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	4-Ø14.5	2-M40X1.5	726	15	616	271	152	300	250	350	18.5	5
200L	2,4,6,8	318	70	388	397	299	210	305	369	133	55	M20X42	110	100	5	16	49	59	200	25	4-Ø18.5	2-M50X1.5	779	17	669	296	190	350	300	400	18.5	5
225S	4,8	356	75	431	446	322	210	286	368	149	60	M20X42	140	125	7.5	18	53	64	225	28	4-Ø18.5	2-M50X1.5	824	20	684	329	190	400	350	450	18.5	5
225M	2	356	75	431	446	322	210	311	393	149	55	M20X42	110	100	5	16	49	59	225	28	4-Ø18.5	2-M50X1.5	819	20	709	299	190	400	350	450	18.5	5
225M	4,6,8	356	75	431	446	322	210	311	393	149	60	M20X42	140	125	7.5	18	53	64	225	28	4-Ø18.5	2-M50X1.5	849	20	709	329	190	400	350	450	18.5	5
250M	2	406	80	484	485	358	248	349	445	168	60	M20X42	140	125	7.5	18	53	64	250	30	4-Ø24	2-M63X1.5	910	22	770	347	218	500	450	550	18.5	5
250M	4,6,8	406	80	484	485	358	248	349	445	168	65	M20X42	140	125	7.5	18	58	69	250	30	4-Ø24	2-M63X1.5	910	22	770	347	218	500	450	550	18.5	5
280S	2	457	85	542	547	387	248	368	485	190	65	M20X42	140	125	7.5	18	58	69	280	35	4-Ø24	2-M63X1.5	982	22	842	355.5	218	500	450	550	18.5	5
280S	4,6,8	457	85	542	547	387	248	368	485	190	75	M20X42	140	125	7.5	20	67.5	79.5	280	35	4-Ø24	2-M63X1.5	982	22	842	355.5	218	500	450	550	18.5	5
280M	2	457	85	542	547	387	248	419	536	190	65	M20X42	140	125	7.5	18	58	69	280	35	4-Ø24	2-M63X1.5	1033	22	893	355.5	218	500	450	550	18.5	5
280M	4,6,8	457	85	542	547	387	248	419	536	190	75	M20X42	140	125	7.5	20	67.5	79.5	280	35	4-Ø24	2-M63X1.5	1033	22	893	355.5	218	500	450	550	18.5	5
315S	2	508	120	628	620	527	320	406	570	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Ø28	2-M63X1.5	1194	22	1054	397	280	600	550	660	24	6
315S	4,6,8,10	508	120	628	620	527	320	406	570	216	80	M20X42	170	160	5	22	71	85	315	45	4-Ø28	2-M63X1.5	1224	22	1054	427	280	600	550	660	24	6
315M	2	508	120	628	620	527	320	457	680	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Ø28	2-M63X1.5	1304	22	1164	397	280	600	550	660	24	6
315M	4,6,8,10	508	120	628	620	527	320	457	680	216	80	M20X42	170	160	5	22	71	85	315	45	4-Ø28	2-M63X1.5	1334	22	1164	427	280	600	550	660	24	6
315L	2	508	120	628	620	527	320	508	680	216	65	M20X42	140	125	7.5	18	58	69	315	45	4-Ø28	2-M63X1.5	1304	22	1164	397	280	600	550	660	24	6
315L	4,6,8,10	508	120	628	620	527	320	508	680	216	80	M20X42	170	160	5	22	71	85	315	45	4-Ø28	2-M63X1.5	1334	22	1164	427	280	600	550	660	24	6
355M	2	610	116	726	698	642	380	560	750	254	75	M20X42	140	130	5	20	67.5	79.5	355	52	6-Ø28	2-M63X1.5	1486	25	1346	414	330	740	680	800	24	6
355M	4,6,8,10	610	116	726	698	642	380	560	750	254	95	M24X50	170	160	5	25	86	100	355	52	6-Ø28	2-M63X1.5	1516	25	1346	444	330	740	680	800	24	6
355L	2	610	116	726	698	642	380	630	750	254	75	M20X42	140	130	5	20	67.5	79.5	355	52	6-Ø28	2-M63X1.5	1486	25	1346	414	330	740	680	800	24	6
355L	4,6,8,10	610	116	726	698	642	380	630	750	254	95	M24X50	170	160	5	25	86	100	355	52	6-Ø28	2-M63X1.5	1516	25	1346	444	330	740	680	800	24	6

JM3 IE3(2级能效 GB2)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS-JM3

IM V1 H160-355

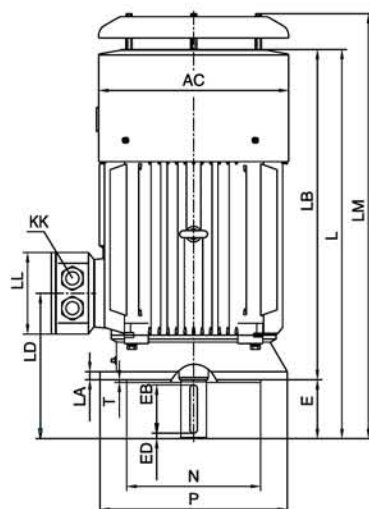

160-200



225-355

型号 TYPE	极数 POLE	AC	AD	AG	D	DH	E	EB	ED	F	G	GA	HD	KK	L	LA	LB	LD	LL	LM	M	N	P	S	T
160M	2, 4, 6, 8	314	251	162	42	M16X36	110	90	10	12	37	45	426	2-M40X1.5	590	15	498	256	152	650	300	250	350	18.5	5
160L	2, 4, 6, 8	314	251	162	42	M16X36	110	90	10	12	37	45	426	2-M40X1.5	645	15	542	256	152	707	300	250	350	18.5	5
180M	2, 4, 8	355	267	162	48	M16X36	110	90	10	14	42.5	51.5	444.5	2-M40X1.5	652	15	578	271	152	724	300	250	350	18.5	5
180L	4, 6, 8	355	267	162	48	M16X36	110	90	10	14	42.5	51.5	444.5	2-M40X1.5	690	15	616	271	152	762	300	250	350	18.5	5
200L	2, 4, 6, 8	397	299	210	55	M20X42	110	100	5	16	49	59	499	2-M50X1.5	746	17	669	296	190	820	350	300	400	18.5	5
225S	4, 8	446	322	210	60	M20X42	140	125	7.5	18	53	64	547	2-M50X1.5	780	20	684	329	190	855	400	350	450	18.5	5
225M	2	446	322	210	55	M20X42	110	100	5	16	49	59	547	2-M50X1.5	810	20	709	299	190	863	400	350	450	18.5	5
225M	4, 6, 8	446	322	210	60	M20X42	140	125	7.5	18	53	64	547	2-M50X1.5	810	20	709	329	190	863	400	350	450	18.5	5
250M	2	485	358	248	60	M20X42	140	125	7.5	18	53	64	633	2-M63X1.5	900	22	770	347	218	976	500	450	550	18.5	5
250M	4, 6, 8	485	358	248	65	M20X42	140	125	7.5	18	58	69	633	2-M63X1.5	900	22	770	347	218	976	500	450	550	18.5	5
280S	2	547	387	248	65	M20X42	140	125	7.5	18	58	69	662	2-M63X1.5	961	22	842	355.5	218	1038	500	450	550	18.5	5
280S	4, 6, 8	547	387	248	75	M20X42	140	125	7.5	20	67.5	79.5	662	2-M63X1.5	961	22	842	355.5	218	1038	500	450	550	18.5	5
280M	2	547	387	248	65	M20X42	140	125	7.5	18	58	69	662	2-M63X1.5	1012	22	893	355.5	218	1090	500	450	550	18.5	5
280M	4, 6, 8	547	387	248	75	M20X42	140	125	7.5	20	67.5	79.5	662	2-M63X1.5	1012	22	893	355.5	218	1090	500	450	550	18.5	5
315S	2	620	527	284	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1194	22	1054	397	280	1275	600	550	660	24	6
315S	4, 6, 8, 10	620	527	284	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1224	22	1054	427	280	1305	600	550	660	24	6
315M	2	620	527	284	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1304	22	1164	397	280	1385	600	550	660	24	6
315M	4, 6, 8, 10	620	527	284	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1334	22	1164	427	280	1415	600	550	660	24	6
315L	2	620	527	284	65	M20X42	140	125	7.5	18	58	69	857	2-M63X1.5	1304	22	1164	397	280	1385	600	550	660	24	6
315L	4, 6, 8, 10	620	527	284	80	M20X42	170	160	5	22	71	85	857	2-M63X1.5	1334	22	1164	427	280	1415	600	550	660	24	6
355M	2	698	642	380	75	M20X42	140	130	5	20	67.5	79.5	1042	2-M63X1.5	1486	25	1346	414	330	1567	740	680	800	24	6
355M	4, 6, 8, 10	698	642	380	95	M24X50	170	160	5	25	86	100	1042	2-M63X1.5	1516	25	1346	444	330	1597	740	680	800	24	6
355L	2	698	642	380	75	M20X42	140	130	5	20	67.5	79.5	1042	2-M63X1.5	1486	25	1346	414	330	1567	740	680	800	24	6
355L	4, 6, 8, 10	698	642	380	95	M24X50	170	160	5	25	86	100	1042	2-M63X1.5	1516	25	1346	444	330	1597	740	680	800	24	6

