

TTN
TTN ELECTRIC

ISO9001 CE

SBW-F THREE
PHASE Series




SERVO MOTOR CONTROL MODEL
ac automatic voltage stabilizer

CLASSIC PRODUCTS



SBW-F-200KVA

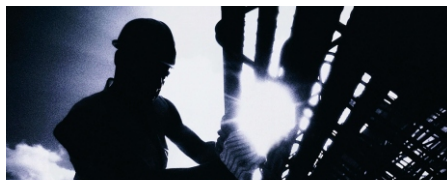

MODEL	SBW-F-50KVA	SBW-F-80KVA	SBW-F-100KVA	SBW-F-150KVA	SBW-F-200KVA	SBW-F-250KVA
TECHNOLOGY	Servo Motor control					
DISPLAY	Meter	A/B/C phase input voltage		Light	A phase working indicator	
		A/B/C phase output voltage			B phase working indicator	
		A phase output voltage			B phase working indicator	
		B phase output voltage			input working indicator	
		C phase output voltage			output working indicator	
PROTECTION	Over voltage		Output voltage $\geq 248V \pm 4V$			
	Low voltage		Output voltage $\leq 170V \pm 4V$			
	Delay time		Long time(3-8M)/short time (5 second)			
	Circuit Breaker		Regulator /By-Pass			
	Feed phase					
INPUT VOLTAGE	Single phase:175V-265V Three phase four-line: 175V-265V(phase voltage) 300V-465V(line voltage) 154V-286V(phase voltage) 270V-490V(line voltage)					
OUTPUT VOLTAGE	Single phase 220V (adjustable) three phase 380V (adjustable)					
FREQUENCY	50Hz/60Hz					
PHASE	Three phase					
RESPONSE TIME	$\leq 1.5S$					
EFFICIENCY	$\geq 95\%$					
AMBIENT TEMPERATURE	$-10^{\circ}C - 40^{\circ}C$					
OVERLOAD	Double related current ,one min					
WAVEFORM DISTORTION	no additional wave form distortion					
INSULATING RESISTANCE	Normally more than 2M Ω					
SPECIFICATIONS						
POWER	50KVA	80KVA	100KVA	150KVA	200KVA	250KVA
PACKING SIZE(cm)	110x85x137	110x85x137	110x85x137	125x100x196	125x100x196	135x100x196
PACKING(pcs)	1	1	1	1	1	1
G.M(kgs)						
POWER	320KVA	400KVA	500KVA	600KVA	800KVA	1000KVA
PACKING SIZE(cm)	135x100x196	135x100x196	135x100x196	135x100x196	135x100x196	203x106x230
PACKING(pcs)	1	1	1	1	1	1
G.M(kgs)						

