



IE2(GB3) 高效三相异步电动机

HIGH EFFICIENCY THREE-PHASE ASYNCHRONOUS MOTOR

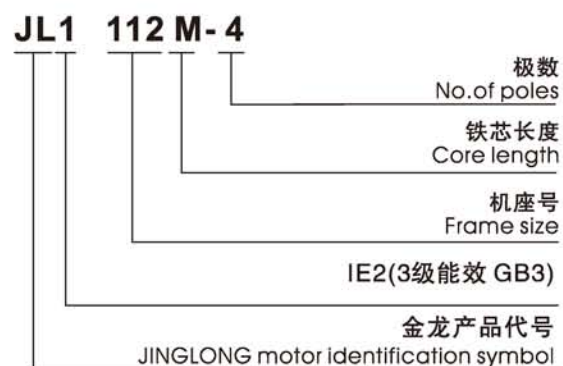


IE2(3级)代号说明 IE2 DESIGNATION

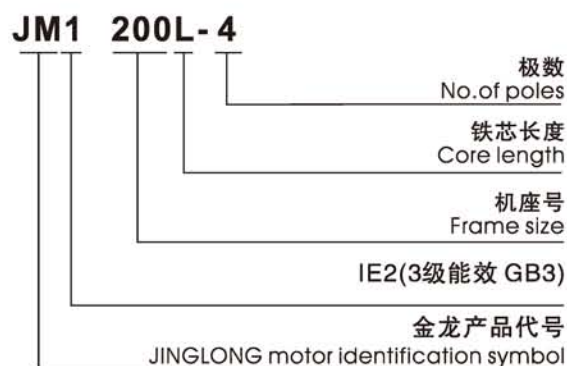

防护等级 PROTECTION DEGREE



冷却方式 COOLING METHOD

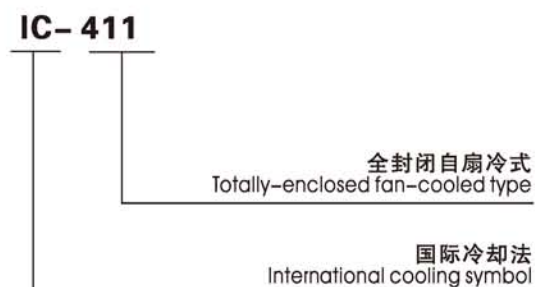

IE2 (GB3)

JL1 IE2(3级能效 GB3)技术参数 TECHNICAL DATA

SPEED 3000RPM 2-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JL1-562-2	0.12	0.18	2720	53.6	53.6	52.5	0.72	0.47	0.45	0.43	0.42	2.1	2.2	5.2	4.4
JL1-631-2	0.18	0.25	2725	60.4	60.4	59.2	0.80	0.57	0.54	0.52	0.63	2.2	2.2	5.5	5.1
JL1-632-2	0.25	0.37	2725	64.8	64.8	63.5	0.81	0.72	0.69	0.66	0.88	2.2	2.2	5.5	5.3
JL1-711-2	0.37	0.5	2745	69.5	69.5	68.1	0.81	1.00	0.95	0.91	1.29	2.2	2.2	6.1	6.4
JL1-712-2	0.55	0.75	2745	74.1	74.1	72.6	0.82	1.38	1.31	1.26	1.91	2.3	2.3	6.1	7.5
JL1-801-2	0.75	1	2875	77.4	77.4	75.9	0.83	1.77	1.69	1.62	2.49	2.3	2.3	6.8	8.9
JL1-802-2	1.1	1.5	2875	79.6	79.6	78.0	0.84	2.50	2.37	2.29	3.65	2.3	2.3	7.1	10
JL1-90S-2	1.5	2	2890	81.3	81.3	79.7	0.84	3.34	3.17	3.06	4.96	2.3	2.3	7.3	12.5
JL1-90L-2	2.2	3	2890	83.2	83.2	81.5	0.85	4.73	4.49	4.33	7.27	2.3	2.3	7.6	15.2
JL1-100L-2	3	4	2891	84.6	84.6	82.9	0.87	6.19	5.88	5.67	9.91	2.2	2.3	7.8	21.5
JL1-112M-2	4	5.5	2914	85.8	85.8	84.1	0.88	8.05	7.65	7.37	13.1	2.2	2.3	8.1	26
JL1-132S1-2	5.5	7.5	2937	87.0	87.0	85.3	0.86	11.2	10.6	10.2	17.9	2.2	2.3	8.2	38.2
JL1-132S2-2	7.5	10	2940	88.1	88.1	86.3	0.88	14.7	14.0	13.5	24.4	2.2	2.3	7.8	44
JL1-160M1-2	11	15	2930	89.4	89.4	87.6	0.89	21.0	20.0	19.2	35.9	2.2	2.3	7.9	80.5
JL1-160M2-2	15	20	2930	90.3	90.3	88.5	0.89	28.4	26.9	26.0	48.9	2.2	2.3	7.9	94.5
JL1-160L-2	18.5	25	2937	90.9	90.9	89.1	0.89	34.7	33.0	31.8	60.2	2.2	2.3	8.0	105
JL1-180M-2	22	30	2940	91.3	91.3	89.5	0.88	41.6	39.5	38.1	71.5	2.2	2.3	8.1	120

SPEED1500RPM 4-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JL1-631-4	0.12	0.18	1315	59.1	59.1	57.9	0.72	0.43	0.41	0.39	0.87	2.1	2.2	4.4	4.6
JL1-632-4	0.18	0.25	1315	64.7	64.7	63.4	0.73	0.58	0.55	0.53	1.31	2.1	2.2	4.4	4.9
JL1-711-4	0.25	0.37	1335	68.5	68.5	67.1	0.74	0.75	0.71	0.69	1.79	2.1	2.2	5.2	6.4
JL1-712-4	0.37	0.5	1335	72.7	72.7	71.2	0.75	1.03	0.98	0.94	2.65	2.1	2.2	5.2	7.3
JL1-801-4	0.55	0.75	1400	77.1	77.1	75.6	0.75	1.45	1.37	1.32	3.75	2.3	2.3	5.2	9
JL1-802-4	0.75	1	1400	79.6	79.6	78.0	0.76	1.88	1.79	1.72	5.12	2.3	2.3	6.4	10.8
JL1-90S-4	1.1	1.5	1440	81.4	81.4	79.8	0.77	2.67	2.53	2.44	7.30	2.3	2.3	6.6	13.8
JL1-90L-4	1.5	2	1445	82.8	82.8	81.1	0.77	3.57	3.40	3.27	9.91	2.3	2.3	6.7	15.8
JL1-100L1-4	2.2	3	1440	84.3	84.3	82.6	0.81	4.90	4.65	4.48	14.6	2.3	2.3	7.3	22.4
JL1-100L2-4	3	4	1440	85.5	85.5	83.8	0.82	6.50	6.18	5.95	19.9	2.3	2.3	7.5	24
JL1-112M-4	4	5.5	1445	86.6	86.6	84.9	0.82	8.56	8.13	7.84	26.4	2.3	2.3	7.5	35
JL1-132S-4	5.5	7.5	1455	87.7	87.7	85.9	0.83	11.5	10.9	10.5	36.1	2.0	2.3	7.5	43
JL1-132M-4	7.5	10	1455	88.7	88.7	86.9	0.84	15.3	14.5	14.0	49.2	2.0	2.3	7.3	54
JL1-160M-4	11	15	1460	89.8	89.8	88.0	0.84	22.2	21.0	20.3	72.0	2.0	2.3	7.4	83
JL1-160L-4	15	20	1460	90.6	90.6	88.8	0.85	29.6	28.1	27.1	98.1	2.0	2.3	7.5	103
JL1-180M-4	18.5	25	1470	91.2	91.2	89.4	0.86	35.8	34.0	32.8	120.2	2.0	2.3	7.6	113.8
JL1-180L-4	22	30	1470	91.6	91.6	89.8	0.86	42.4	40.3	38.9	142.9	2.1	2.3	7.7	127

JL1 IE2(3级能效 GB3)技术参数 TECHNICAL DATA

SPEED1000RPM 6-POLE 50HZ


型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JL1-632-6	0.12	0.18	850	50.6	50.6	49.6	0.60	0.6	0.57	0.55	1.35	2.0	2.1	4.4	5.5
JL1-711-6	0.18	0.25	850	56.6	56.6	55.5	0.66	0.73	0.70	0.67	2.02	2.0	2.1	4.0	7.8
JL1-712-6	0.25	0.37	850	61.6	61.6	60.4	0.68	0.91	0.86	0.83	2.81	2.0	2.1	4.0	8.1
JL1-801-6	0.37	0.5	885	67.6	67.6	66.2	0.70	1.19	1.13	1.09	3.99	2.0	2.1	4.7	10.2
JL1-802-6	0.55	0.75	885	73.1	73.1	71.6	0.72	1.59	1.51	1.45	5.94	2.0	2.1	4.7	11.3
JL1-90S-6	0.75	1	934	75.9	75.9	74.4	0.72	2.09	1.98	1.91	7.67	2.0	2.1	5.3	12.5
JL1-90L-6	1.1	1.5	945	78.1	78.1	76.5	0.72	2.97	2.82	2.72	11.1	2.0	2.1	5.0	16.6
JL1-100L-6	1.5	2	945	79.8	79.8	78.2	0.75	3.81	3.62	3.49	15.2	2.0	2.1	5.5	22.5
JL1-112M-6	2.2	3	960	81.8	81.8	80.2	0.76	5.38	5.11	4.92	21.9	2.0	2.1	5.5	27.5
JL1-132S-6	3	4	964	83.3	83.3	81.6	0.76	7.20	6.84	6.59	29.7	2.0	2.1	6.5	41.5
JL1-132M1-6	4	5.5	965	84.6	84.6	82.9	0.76	9.45	8.98	8.66	39.6	2.0	2.1	6.5	49
JL1-132M2-6	5.5	7.5	965	86.0	86.0	84.3	0.77	12.6	12.0	11.6	54.4	2.0	2.1	6.5	52.5
JL1-160M-6	7.5	10	970	87.2	87.2	85.5	0.78	16.8	15.9	15.3	73.8	2.0	2.1	6.5	85
JL1-160L-6	11	15	970	88.7	88.7	86.9	0.78	24.2	22.9	22.1	108.3	2.0	2.1	6.5	101
JL1-180L-6	15	20	975	89.7	89.7	87.9	0.81	31.4	29.8	28.7	146.9	2.0	2.1	7.0	105

SPEED 750RPM 8-POLE 50HZ


型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In	重量 Weight kg
	kW	HP						380V	400V	415V					
JL1-712-8	0.12	0.18	605	39.8	39.8	39.0	0.57	0.80	0.76	0.74	1.89	1.8	1.9	2.8	9.3
JL1-801-8	0.18	0.25	650	45.9	45.9	45.0	0.61	0.98	0.93	0.89	2.64	1.8	1.9	3.3	10.2
JL1-802-8	0.25	0.37	650	50.6	50.6	49.6	0.61	1.23	1.17	1.13	3.67	1.8	1.9	3.3	10.8
JL1-90S-8	0.37	0.5	675	56.1	56.1	55.0	0.61	1.64	1.56	1.50	5.23	1.8	1.9	4.0	15.1
JL1-90L-8	0.55	0.75	675	61.7	61.7	60.5	0.61	2.22	2.11	2.03	7.78	1.8	2.0	4.0	18.4
JL1-100L1-8	0.75	1	685	66.2	66.2	64.9	0.67	2.57	2.44	2.35	10.5	1.8	2.0	4.0	25.2
JL1-100L2-8	1.1	1.5	685	70.8	70.8	69.4	0.69	3.42	3.25	3.13	15.3	1.8	2.0	5.0	26.5
JL1-112M-8	1.5	2	695	74.1	74.1	72.6	0.70	4.39	4.17	4.02	20.6	1.8	2.0	5.0	33.5
JL1-132S-8	2.2	3	710	77.6	77.6	76.0	0.71	6.07	5.76	5.56	29.6	1.8	2.0	6.0	43.2
JL1-132M-8	3	4	710	80.0	80.0	78.4	0.73	7.80	7.41	7.15	40.4	1.8	2.0	6.0	51.5
JL1-160M1-8	4	5.5	725	81.9	81.9	80.3	0.73	10.2	9.66	9.31	52.7	1.9	2.0	6.0	80
JL1-160M2-8	5.5	7.5	725	83.8	83.8	82.1	0.74	13.5	12.8	12.3	72.4	2.0	2.0	6.0	89.5
JL1-160L-8	7.5	10	725	85.3	85.3	83.6	0.75	17.8	16.9	16.3	98.8	2.0	2.0	6.0	103
JL1-180L-8	11	15	735	86.9	86.9	85.2	0.75	25.6	24.4	23.5	142.9	2.0	2.0	6.0	107

JL1 IE2(3级能效 GB3)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS


IM B3 56-180

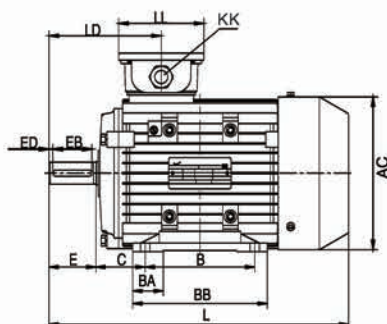

56-90

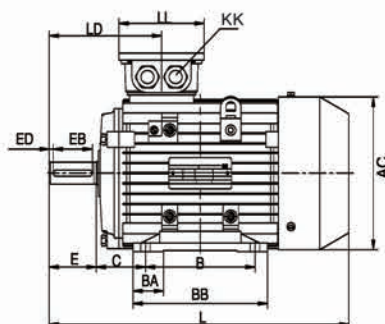


100-180




型号 Type	A	AA	AB	AC	AD	AG	B	BA	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LD	LL
56	90	23	111	113	86	90	71	22.5	88	36	9	M4X12	20	16	2	3	7.2	10.2	56	7	5.8X8.3	1-M20X1.5	199	83	86
63	100	24	123	120	101	100	80	25.5	100	40	11	M4X12	23	16	3.5	4	8.5	12.5	63	7	7X9.5	1-M20X1.5	217	95.5	101
71	112	26	138	136	101	112	90	27.5	110	45	14	M5X12	30	25	2.5	5	11	16	71	8	7X11	1-M20X1.5	245	110.5	101
80	125	35	157	155	101	125	100	32.5	125	50	19	M6X16	40	30	5	6	15.5	21.5	80	9	10X14	1-M25X1.5	287	118	101
90S	140	37	173	175	109	140	100	32.5	125	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	310	136	109
90L	140	37	173	175	109	140	125	32.5	150	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	335	136	109
100L	160	40	196	195	109	160	140	39	172	63	28	M10X22	60	50	5	8	24	31	100	11	12X16	1-M32X1.5	383	144	109
112M	190	41	227	219	117.5	190	140	43	180	70	28	M10X22	60	50	5	8	24	31	112	12	12X16	2-M32X1.5	401	152	117.5
132S	216	51	262	258	117.5	216	140	46	186	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	475	180	117.5
132M	216	51	262	258	117.5	216	178	46	224	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	513	180	117.5
160M	254	55	304	315	167	254	210	50	260	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	609	268.5	157
160L	254	55	304	315	167	254	254	50	304	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	653	268.5	157
180M	279	75	350	355	167	279	241	61	311	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	15X18	2-M40X1.5	727	386	157
180L	279	75	350	355	167	279	279	61	350	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	15X18	2-M40X1.5	765	386	157


IM B5 56-180

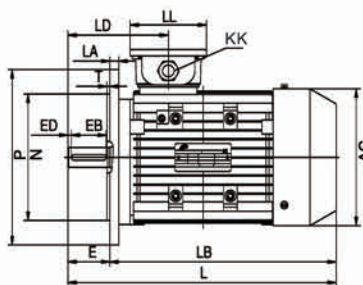

56-90

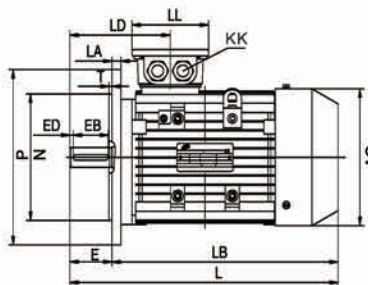


100-180




型号 Type	AC	AD	AG	D	DH	E	EB	ED	F	G	GA	HD	KK	L	LA	LB	LD	LL	M	N	P	S	T
56	113	96	86	9	M4X12	20	16	2	3	7.2	10.2	156	1-M20X1.5	199	8	179	83	86	100	80	120	7	3
63	120	102	101	11	M4X12	23	16	3.5	4	8.5	12.5	172	1-M20X1.5	217	10	194	95.5	101	115	95	140	10	3
71	136	109	101	14	M5X12	30	25	2.5	5	11	16	189	1-M20X1.5	245	10	215	110.5	101	130	110	160	10	3.5
80	155	124	101	19	M6X16	40	30	5	6	15.5	21.5	224	1-M25X1.5	287	12	247	118	101	165	130	200	12	3.5
90S	175	137	109	24	M8X19	50	40	5	8	20	27	237	1-M25X1.5	310	11	260	136	109	165	130	200	12	3.5
90L	175	137	109	24	M8X19	50	40	5	8	20	27	237	1-M25X1.5	335	11	285	136	109	165	130	200	12	3.5
100L	195	151	109	28	M10X22	60	50	5	8	24	31	276	1-M32X1.5	383	13	323	144	109	215	180	250	14.5	4
112M	219	169	117.5	28	M10X22	60	50	5	8	24	31	294	2-M32X1.5	401	14	341	152	117.5	215	180	250	14.5	4
132S	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	338	2-M32X1.5	475	14	395	180	117.5	265	230	300	14.5	4
132M	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	338	2-M32X1.5	513	14	433	180	117.5	265	230	300	14.5	4
160M	315	242	167	42	M16X36	110	90	10	12	37	45	417	2-M40X1.5	609	15	499	268.5	157	300	250	350	18.5	5
160L	315	242	167	42	M16X36	110	90	10	12	37	45	417	2-M40X1.5	653	15	543	268.5	157	300	250	350	18.5	5
180M	355	272	167	48	M16X36	110	90	10	14	42.5	51.5	447	2-M40X1.5	727	15	617	386	157	300	250	350	18.5	5
180L	355	272	167	48	M16X36	110	90	10	14	42.5	51.5	447	2-M40X1.5	765	15	655	386	157	300	250	350	18.5	5

JL1 IE2(3级能效 GB3)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS


IM B35 56-180

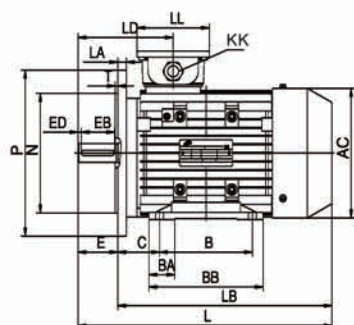

56-90

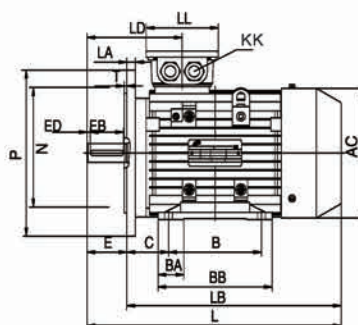


100-180




型号 Type	A	AA	AB	AC	AD	AG	B	BA	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LA	LB	LD	LL	M	N	P	S	T
56	90	23	111	113	96	86	71	22.5	88	36	9	M4X12	20	16	2	3	7.2	10.2	56	7	5.8X8.3	1-M20X1.5	199	8	179	83	86	100	80	120	7	3
63	100	24	123	120	102	101	80	25.5	100	40	11	M4X12	23	16	3.5	4	8.5	12.5	63	7	7X9.5	1-M20X1.5	217	10	194	95.5	101	115	95	140	10	3
71	112	26	138	136	109	101	90	27.5	110	45	14	M5X12	30	25	2.5	5	11	16	71	8	7X11	1-M20X1.5	245	10	215	110.5	101	130	110	160	10	3.5
80	125	35	157	155	124	101	100	32.5	125	50	19	M6X16	40	30	5	6	15.5	21.5	80	9	10X14	1-M25X1.5	287	12	247	118	101	165	130	200	12	3.5
90S	140	37	173	175	137	109	100	32.5	125	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	310	11	260	136	109	165	130	200	12	3.5
90L	140	37	173	175	137	109	125	32.5	150	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	335	11	285	136	109	165	130	200	12	3.5
100L	160	40	196	195	151	109	140	39	172	63	28	M10X22	60	50	5	8	24	31	100	11	12X16	1-M32X1.5	383	13	323	144	109	215	180	250	14.5	4
112M	190	41	227	219	169	117.5	140	43	180	70	28	M10X22	60	50	5	8	24	31	112	12	12X16	2-M32X1.5	401	14	341	152	117.5	215	180	250	14.5	4
132S	216	51	262	258	188	117.5	140	46	186	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	475	14	395	180	117.5	265	230	300	14.5	4
132M	216	51	262	258	188	117.5	178	46	224	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	513	14	433	180	117.5	265	230	300	14.5	4
160M	254	55	304	315	242	167	210	50	260	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	609	15	499	268.5	157	300	250	350	18.5	5
160L	254	55	304	315	242	167	254	50	304	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	653	15	543	268.5	157	300	250	350	18.5	5
180M	279	75	350	355	272	167	241	61	311	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	15X18	2-M40X1.5	727	15	617	386	157	300	250	350	18.5	5
180L	279	75	350	355	272	167	279	61	350	121	48	M16X36	110	90	10	14	42.5	51.5	180	22	15X18	2-M40X1.5	765	15	655	386	157	300	250	350	18.5	5


IM B34A 56-180

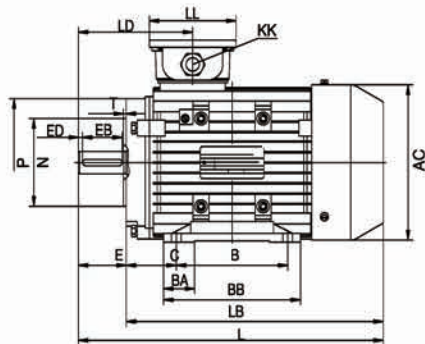

56-90

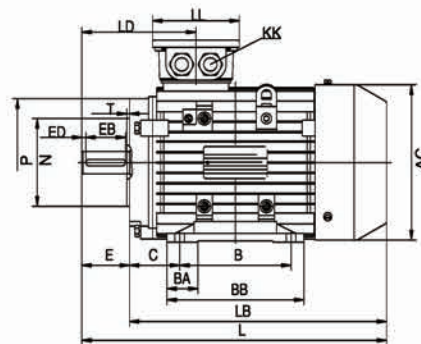


100-160




型号 Type	A	AA	AB	AC	AD	AG	B	BA	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LB	LD	LL	M	N	P	S	T
56	90	23	111	113	96	86	71	22.5	88	36	9	M4X12	20	16	2	3	7.2	10.2	56	7	5.8X8.3	1-M20X1.5	199	179	83	86	65	50	80	M5	2.5
63	100	24	123	120	102	101	80	25.5	100	40	11	M4X12	23	16	3.5	4	8.5	12.5	63	7	7X9.5	1-M20X1.5	217	194	95.5	101	75	60	90	M5	2.5
71	112	26	138	136	109	101	90	27.5	110	45	14	M5X12	30	25	2.5	5	11	16	71	8	7X11	1-M20X1.5	245	215	110.5	101	85	70	105	M6	2.5
80	125	35	157	155	124	101	100	32.5	125	50	19	M6X16	40	30	5	6	15.5	21.5	80	9	10X14	1-M25X1.5	287	247	118	101	100	80	120	M6	3
90S	140	37	173	175	137	109	100	32.5	125	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	310	260	136	109	115	95	140	M8	3
90L	140	37	173	175	137	109	125	32.5	150	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	335	285	136	109	115	95	140	M8	3
100L	160	40	196	195	151	109	140	39	172	63	28	M10X22	60	50	5	8	24	31	100	11	12X16	1-M32X1.5	383	323	144	109	130	110	160	M8	3.5
112M	190	41	227	219	169	117.5	140	43	180	70	28	M10X22	60	50	5	8	24	31	112	12	12X16	2-M32X1.5	401	341	152	117.5	130	110	160	M8	3.5
132S	216	51	262	258	188	117.5	140	46	186	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	475	395	180	117.5	165	130	200	M10	3.5
132M	216	51	262	258	188	117.5	178	46	224	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	513	433	180	117.5	165	130	200	M10	3.5
160M	254	55	304	315	242	167	210	50	260	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	609	499	268.5	167	215	180	250	M12	4
160L	254	55	304	315	242	167	254	50	304	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	653	543	268.5	167	215	180	250	M12	4

JL1 IE2(3级能效 GB3)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS


IM B14A 56-160

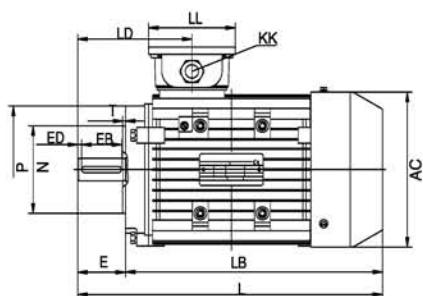

56-90

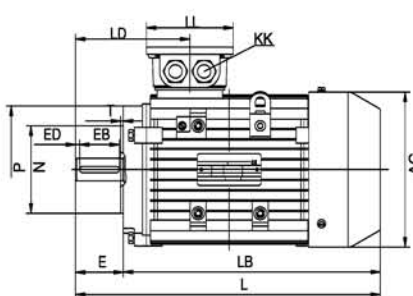


100-160




型号 Type	AC	AD	AG	D	DH	E	EB	ED	F	G	GA	HD	KK	L	LB	LD	LL	M	N	P	S	T
56	113	96	86	9	M4X12	20	16	2	3	7.2	10.2	152.5	1-M20X1.5	199	179	83	86	65	50	80	M5	2.5
63	120	102	101	11	M4X12	23	16	3.5	4	8.5	12.5	162	1-M20X1.5	217	194	95.5	101	75	60	90	M5	2.5
71	136	109	101	14	M5X12	30	25	2.5	5	11	16	177	1-M20X1.5	245	215	110.5	101	85	70	105	M6	2.5
80	155	124	101	19	M6X16	40	30	5	6	15.5	21.5	201.5	1-M25X1.5	287	247	118	101	100	80	120	M6	3
90S	175	137	109	24	M8X19	50	40	5	8	20	27	224.5	1-M25X1.5	310	260	136	109	115	95	140	M8	3
90L	175	137	109	24	M8X19	50	40	5	8	20	27	224.5	1-M25X1.5	335	285	136	109	115	95	140	M8	3
100L	195	151	109	28	M10X22	60	50	5	8	24	31	248.5	1-M32X1.5	383	323	144	109	130	110	160	M8	3.5
112M	219	169	117.5	28	M10X22	60	50	5	8	24	31	278.5	2-M32X1.5	401	341	152	117.5	130	110	160	M8	3.5
132S	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	317	2-M32X1.5	475	395	180	117.5	165	130	200	M10	3.5
132M	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	317	2-M32X1.5	513	433	180	117.5	165	130	200	M10	3.5
160M	315	242	167	42	M16X36	110	90	10	12	37	45	399.5	2-M40X1.5	609	499	268.5	157	215	180	250	M12	4
160L	315	242	167	42	M16X36	110	90	10	12	37	45	399.5	2-M40X1.5	653	543	268.5	157	215	180	250	M12	4


IM B34B 56-160

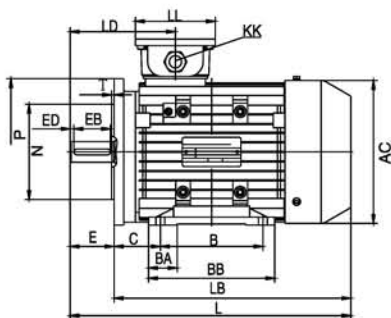

56-90

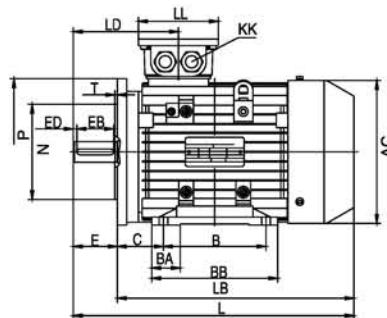


100-160





型号 Type	A	AA	AB	AC	AD	AG	B	BA	BB	C	D	DH	E	EB	ED	F	G	GA	H	HA	K	KK	L	LB	LD	LL	M	N	P	S	T
56	90	23	111	113	96	86	71	22.5	88	36	9	M4X12	20	16	2	3	7.2	10.2	56	7	5.8X8.3	1-M20X1.5	199	179	83	86	85	70	105	M6	2.5
63	100	24	123	120	102	101	80	25.5	100	40	11	M4X12	23	16	3.5	4	8.5	12.5	63	7	7X9.5	1-M20X1.5	217	194	95.5	101	100	80	120	M6	3
71	112	26	138	136	109	101	90	27.5	110	45	14	M5X12	30	25	2.5	5	11	16	71	8	7X11	1-M20X1.5	245	215	110.5	101	115	95	140	M8	3
80	125	35	157	155	124	101	100	32.5	125	50	19	M6X16	40	30	5	6	15.5	21.5	80	9	10X14	1-M25X1.5	287	247	118	101	130	110	160	M8	3.5
90S	140	37	173	175	137	109	100	32.5	125	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	310	260	136	109	130	110	160	M8	3.5
90L	140	37	173	175	137	109	125	32.5	150	56	24	M8X19	50	40	5	8	20	27	90	10	10X14	1-M25X1.5	335	285	136	109	130	110	160	M8	3.5
100L	160	40	196	195	151	109	140	39	172	63	28	M10X22	60	50	5	8	24	31	100	11	12X16	1-M32X1.5	383	323	144	109	165	130	200	M10	3.5
112M	190	41	227	219	169	117.5	140	43	180	70	28	M10X22	60	50	5	8	24	31	112	12	12X16	2-M32X1.5	401	341	152	117.5	165	130	200	M10	3.5
132S	216	51	262	258	188	117.5	140	46	186	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	475	395	180	117.5	215	180	250	M12	4
132M	216	51	262	258	188	117.5	178	46	224	89	38	M12X28	80	65	7.5	10	33	41	132	15	12X16	2-M32X1.5	513	433	180	117.5	215	180	250	M12	4
160M	254	55	304	315	242	167	210	50	260	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	609	499	268.5	157	265	230	300	M12	4
160L	254	55	304	315	242	167	254	50	304	108	42	M16X36	110	90	10	12	37	45	160	18	15X18	2-M40X1.5	653	543	268.5	157	265	230	300	M12	4

JL1 IE2(3级能效 GB3)安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS


IM B14B 56-160

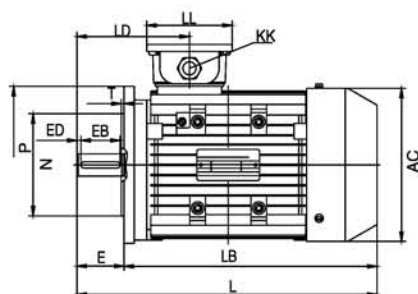

56-90

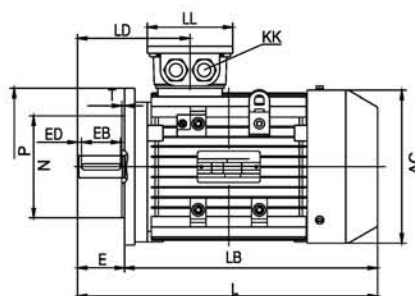

100-160



型号 Type	AC	AD	AG	D	DH	E	EB	ED	F	G	GA	HD	KK	L	LB	LD	LL	M	N	P	S	T
56	113	96	86	9	M4X12	20	16	2	3	7.2	10.2	152.5	1-M20X1.5	199	179	83	86	85	70	105	M6	2.5
63	120	102	101	11	M4X12	23	16	3.5	4	8.5	12.5	162	1-M20X1.5	217	194	95.5	101	100	80	120	M6	3
71	136	109	101	14	M5X12	30	25	2.5	5	11	16	179	1-M20X1.5	245	215	110.5	101	115	95	140	M8	3
80	155	124	101	19	M6X16	40	30	5	6	15.5	21.5	204	1-M25X1.5	287	247	118	101	130	110	160	M8	3.5
90S	175	137	109	24	M8X19	50	40	5	8	20	27	224.5	1-M25X1.5	310	260	136	109	130	110	160	M8	3.5
90L	175	137	109	24	M8X19	50	40	5	8	20	27	224.5	1-M25X1.5	335	285	136	109	130	110	160	M8	3.5
100L	195	151	109	28	M10X22	60	50	5	8	24	31	251	1-M32X1.5	383	323	144	109	165	130	200	M10	3.5
112M	219	169	117.5	28	M10X22	60	50	5	8	24	31	278.5	2-M32X1.5	401	341	152	117.5	165	130	200	M10	3.5
132S	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	317	2-M32X1.5	475	395	180	117.5	215	180	250	M12	4
132M	258	188	117.5	38	M12X28	80	65	7.5	10	33	41	317	2-M32X1.5	513	433	180	117.5	215	180	250	M12	4
160M	315	242	167	42	M16X36	110	90	10	12	37	45	399.5	2-M40X1.5	609	499	268.5	157	265	230	300	M12	4
160L	315	242	167	42	M16X36	110	90	10	12	37	45	399.5	2-M40X1.5	653	543	268.5	157	265	230	300	M12	4

