

JM3 /JM1 ODP ENERGY-SAVING THREE-PHASE
ASYNCHRONOUS MOTOR
JM3 /JM1 ODP 开启式节能三相异步电动机



概述

GENERALIZATION

JM1、JM3系列ODP开启式高效、超高效电机是我司自主开发的节能三相异步电动机，防护等级为IP23，机座号160-355，适用于运行环境比较清洁，无雨水、粉尘、特殊气体及其它有害物质。用于驱动切削机床、泵、风机、压缩机、运输机械及其他机械设备等。在额定功率和效率相同的情况下，由于IP23防护结构的散热条件好，产品的成本会降低。

JM1, JM3 series ODP high efficiency and premium efficiency motors are the energy-saving motor developed by ourselves. It is with IP23 protection degree and available on frame size 160 to 355, and suitable for environment which is rather clean and without rain, dust, special gas and other hazardous material. It is widely used to drive cutting machine, pump, fan, compressor and conveyor and other machines. Under the same rating, the cost of IP23 motor will be lower because of its good cooling feature.

使用条件

OPERATING CONDITIONS

环境温度：-15℃ ≤ θ ≤ 40℃
 海拔：不超过1000m
 额定电压：220-690V
 额定频率：50/60Hz
 工作方法：连续(S1)
 绝缘等级：F，绕组定子温升考核80K
 防护等级：IP23
 冷却方式：IC01


Ambient Temperature: -15℃ ≤ θ ≤ 40℃
 Altitude: up to 1000m above sea level
 Rated Voltage: 220-690V
 Duty Type: Continuous (S1)
 Insulation Class: F with a temperature rise 80K
 Protection Degree: IP23
 Cooling Method: IC01

代号说明

DESIGNATION


产品型号

MOTOR IDENTIFICATION SYMBOL

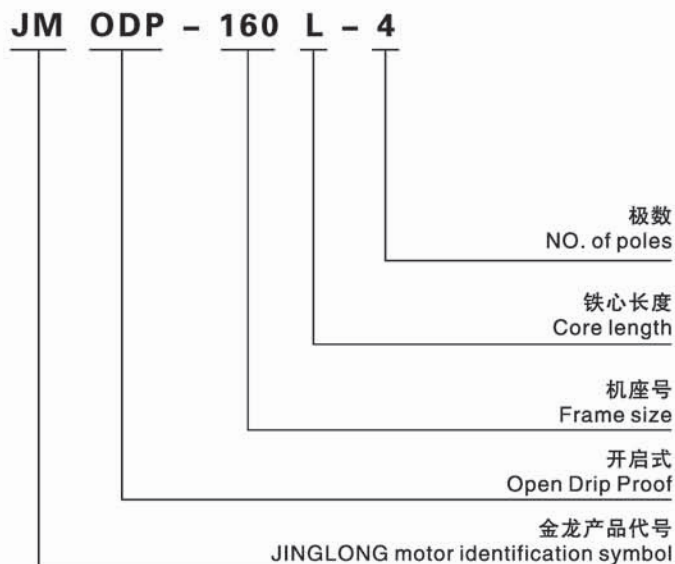

防护等级

PROTECTION DEGREE

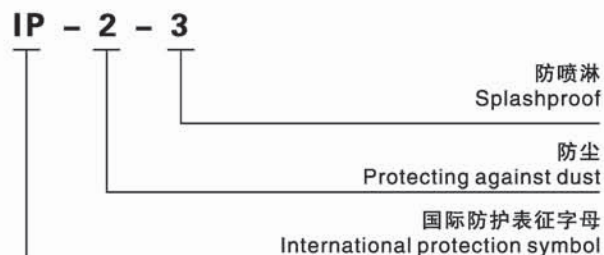

IC - 01



JM3 IE3 技术参数 TECHNICAL DATA

SPEED 3000RPM 2-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos \Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM3-160M1-2	11	15	2945	91.2	91.2	88.5	0.89	20.6	19.6	18.9	35.7	2.0	2.3	8.1
JM3-160M2-2	15	20	2945	91.9	91.9	89.1	0.89	27.9	26.5	25.5	48.6	2.2	2.3	8.1
JM3-160L1-2	18.5	25	2945	92.4	92.4	89.6	0.89	34.2	32.5	31.3	60.0	2.2	2.3	8.1
JM3-160L2-2	22	30	2945	92.7	92.7	89.9	0.89	40.5	38.5	37.1	71.3	2.2	2.3	8.1
JM3-180M1-2	22	30	2950	92.7	92.7	89.9	0.89	40.5	38.5	37.1	71.2	2.1	2.3	8.1
JM3-180M2-2	30	40	2950	93.3	93.3	90.5	0.89	54.9	52.1	50.3	97.1	2.1	2.3	7.6
JM3-200L1-2	30	40	2965	93.3	93.3	90.5	0.89	54.9	52.1	50.3	96.6	2.0	2.3	7.6
JM3-200L2-2	37	50	2965	93.7	93.7	90.9	0.89	67.4	64.0	61.7	119.2	2.0	2.3	7.6
JM3-200L3-2	45	60	2965	94.0	94.0	91.2	0.90	80.8	76.8	74.0	144.9	2.0	2.3	7.7
JM3-225M1-2	45	60	2965	94.0	94.0	91.2	0.90	80.8	76.8	74.0	144.9	2.0	2.3	7.7
JM3-225M2-2	55	75	2965	94.3	94.3	91.5	0.90	98.5	93.5	90.2	177.2	2.0	2.3	7.7
JM3-250M1-2	55	75	2970	94.3	94.3	91.5	0.90	98.5	93.5	90.2	176.9	1.9	2.3	7.7
JM3-250M2-2	75	100	2970	94.7	94.7	91.9	0.90	134	127	122	241.2	2.0	2.3	7.7
JM3-280S-2	75	100	2975	94.7	94.7	91.9	0.90	134	127	122	240.8	1.8	2.3	7.1
JM3-280M1-2	90	125	2975	95.0	95.0	92.2	0.90	160	152	146	288.9	1.7	2.3	7.1
JM3-280M2-2	110	150	2975	95.2	95.2	92.3	0.90	195	185	179	353.1	1.8	2.3	7.1
JM3-315S-2	110	150	2980	95.2	95.2	92.3	0.90	195	185	179	352.5	1.8	2.2	7.2
JM3-315M-2	132	180	2980	95.4	95.4	92.5	0.91	231	219	212	423.0	1.8	2.2	7.2
JM3-315L1-2	160	200	2980	95.4	95.4	92.5	0.91	280	266	256	512.8	1.8	2.2	7.2
JM3-315L2-2	200	270	2980	95.8	95.8	92.9	0.91	349	331	319	640.9	1.8	2.2	7.2
JM3-315L3-2	250	340	2980	95.8	95.8	92.9	0.91	436	414	399	801.2	1.8	2.2	7.2
JM3-355M-2	250	340	2980	95.8	95.8	92.9	0.91	436	414	399	801.2	1.6	2.2	7.2
JM3-355L1-2	315	430	2980	95.8	95.8	92.9	0.92	543	516	497	1009.5	1.6	2.2	7.3
JM3-355L2-2	355	475	2980	95.8	95.8	92.9	0.92	612	581	560	1137.7	1.8	2.2	7.3
JM3-355L3-2	375	500	2980	95.8	95.8	92.9	0.92	646	614	592	1201.8	1.7	2.2	7.3

SPEED 1500RPM 4-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos \Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM3-160M-4	11	15	1470	91.4	91.4	88.7	0.84	21.8	20.7	19.9	71.5	2.2	2.3	7.7
JM3-160L1-4	15	20	1470	92.1	92.1	89.3	0.85	29.1	27.7	26.7	97.4	2.2	2.3	7.8
JM3-160L2-4	18.5	25	1470	92.6	92.6	89.8	0.85	35.7	33.9	32.7	120.2	2.2	2.3	7.9
JM3-180M-4	18.5	25	1475	92.6	92.6	89.8	0.85	35.7	33.9	32.7	119.8	2.0	2.3	7.9
JM3-180L1-4	22	30	1475	93.0	93.0	90.2	0.85	42.3	40.2	38.7	142.4	2.2	2.3	8.0
JM3-180L2-4	30	40	1475	93.6	93.6	90.8	0.86	56.6	53.8	51.8	194.2	2.2	2.3	7.4
JM3-200L1-4	30	40	1480	93.6	93.6	90.8	0.86	56.6	53.8	51.8	193.6	2.2	2.3	7.3
JM3-200L2-4	37	50	1480	93.9	93.9	91.1	0.86	69.6	66.1	63.7	238.8	2.2	2.3	7.4
JM3-225S-4	37	50	1485	93.9	93.9	91.1	0.86	69.6	66.1	63.7	237.9	2.0	2.3	7.4
JM3-225M1-4	45	60	1485	94.2	94.2	91.4	0.86	84.4	80.2	77.3	289.4	2.0	2.3	7.5
JM3-225M2-4	55	75	1485	94.6	94.6	91.8	0.86	103	97.6	94.1	353.7	2.0	2.3	7.5
JM3-250M1-4	55	75	1485	94.6	94.6	91.8	0.86	103	97.6	94.1	353.7	2.0	2.3	7.5
JM3-250M2-4	75	100	1485	95.0	95.0	92.2	0.88	136	129	125	482.3	2.0	2.3	6.9
JM3-280S-4	75	100	1485	95.0	95.0	92.2	0.88	136	129	125	482.3	2.0	2.2	6.9
JM3-280M1-4	90	125	1485	95.2	95.2	92.3	0.88	163	155	149	578.8	2.0	2.2	6.9
JM3-280M2-4	110	150	1485	95.4	95.4	92.5	0.89	197	187	180	707.4	2.0	2.2	7.0
JM3-315S-4	110	150	1490	95.4	95.4	92.5	0.89	197	187	180	705.0	2.0	2.2	7.0
JM3-315M-4	132	180	1490	95.6	95.6	92.7	0.89	236	224	216	846.0	2.0	2.2	7.0
JM3-315L1-4	160	200	1490	95.8	95.8	92.9	0.89	285	271	261	1025.5	2.0	2.2	7.1
JM3-315L2-4	200	270	1490	96.0	96.0	93.1	0.90	352	334	322	1281.9	2.0	2.2	7.2
JM3-315L3-4	250	340	1490	96.0	96.0	93.1	0.91	435	413	398	1602.3	2.0	2.2	7.2
JM3-355M-4	250	340	1490	96.0	96.0	93.1	0.91	435	413	398	1602.3	1.8	2.2	7.2
JM3-355L1-4	315	430	1490	96.0	96.0	93.1	0.92	542	515	496	2019.0	1.8	2.2	7.2
JM3-355L2-4	355	475	1490	96.0	96.0	93.1	0.92	611	580	559	2275.3	1.8	2.2	7.2
JM3-355L3-4	375	500	1490	96.0	96.0	93.1	0.92	645	613	591	2403.5	1.8	2.2	7.2

JM3 IE3 技术参数 TECHNICAL DATA

SPEED 1000RPM 6-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM3-160M-6	7.5	10	975	89.1	89.1	86.4	0.79	16.2	15.4	14.8	73.5	2.0	2.1	7.0
JM3-160L-6	11	15	975	90.3	90.3	87.6	0.80	23.1	22.0	21.2	107.7	2.0	2.1	7.2
JM3-180L1-6	15	20	980	91.2	91.2	88.5	0.83	30.1	28.6	27.6	146.2	2.0	2.1	7.5
JM3-180L2-6	18.5	25	980	91.7	91.7	88.9	0.83	36.9	35.1	33.8	180.3	2.0	2.1	7.6
JM3-200L1-6	18.5	25	985	91.7	91.7	88.9	0.83	36.9	35.1	33.8	179.4	2.0	2.1	7.6
JM3-200L2-6	22	30	985	92.2	92.2	89.4	0.84	43.2	41.0	39.5	213.3	2.0	2.1	7.7
JM3-200L3-6	30	40	985	92.9	92.9	90.1	0.83	59.1	56.2	54.1	290.9	2.1	2.1	7.0
JM3-225M1-6	30	40	985	92.9	92.9	90.1	0.83	59.1	56.2	54.1	290.9	2.0	2.1	7.0
JM3-225M2-6	37	50	985	93.3	93.3	90.5	0.84	71.7	68.1	65.7	358.7	2.0	2.1	7.1
JM3-250M1-6	37	50	985	93.3	93.3	90.5	0.84	71.7	68.1	65.7	358.7	2.0	2.1	7.1
JM3-250M2-6	45	60	985	93.7	93.7	90.9	0.84	86.9	82.5	79.5	436.3	2.0	2.3	7.2
JM3-280S-6	45	60	990	93.7	93.7	90.9	0.84	86.9	82.5	79.5	434.1	2.0	2.0	7.2
JM3-280M1-6	55	75	990	94.1	94.1	91.3	0.85	104	99.3	95.7	530.6	2.0	2.0	7.3
JM3-280M2-6	75	100	990	94.6	94.6	91.8	0.85	142	135	130	723.5	2.0	2.0	6.7
JM3-315S-6	75	100	990	94.6	94.6	91.8	0.85	142	135	130	723.5	2.0	2.0	6.7
JM3-315M-6	90	125	990	94.9	94.9	92.1	0.85	170	161	155	868.2	2.0	2.0	6.7
JM3-315L1-6	110	150	990	95.1	95.1	92.2	0.85	207	196	189	1061.1	2.0	2.0	6.7
JM3-315L2-6	132	180	990	95.4	95.4	92.5	0.86	244	232	224	1273.3	2.0	2.0	6.8
JM3-315L3-6	160	200	990	95.6	95.6	92.7	0.86	296	281	271	1543.4	2.0	2.0	6.8
JM3-355M1-6	160	200	990	95.6	95.6	92.7	0.86	296	281	271	1543.4	1.8	2.0	6.8
JM3-355M2-6	200	270	990	95.8	95.8	92.9	0.87	365	346	334	1929.3	1.8	2.0	6.9
JM3-355L1-6	250	340	990	95.8	95.8	92.9	0.87	456	433	417	2411.6	1.8	2.0	6.9
JM3-355L2-6	315	430	990	95.8	95.8	92.9	0.87	574	546	526	3038.6	1.8	2.0	6.9

SPEED 750RPM 8-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE3)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM3-160M1-8	4	5.5	730	84.8	84.8	82.3	0.70	10.2	9.73	9.37	52.3	1.8	2.1	6.4
JM3-160M2-8	5.5	7.5	730	86.2	86.2	83.6	0.71	13.7	13.0	12.5	72.0	1.8	2.1	6.6
JM3-160L-8	7.5	10	730	87.3	87.3	84.7	0.72	18.1	17.2	16.6	98.1	1.8	2.1	6.3
JM3-180L1-8	11	15	735	88.6	88.6	85.9	0.74	25.5	24.2	23.3	142.9	1.8	2.1	6.6
JM3-180L2-8	15	20	735	89.6	89.6	86.9	0.75	33.9	32.2	31.1	194.9	1.8	2.1	6.8
JM3-200L1-8	15	20	735	89.6	89.6	86.9	0.75	33.9	32.2	31.1	194.9	1.8	2.1	6.8
JM3-200L2-8	18.5	25	735	90.1	90.1	87.4	0.75	41.6	39.5	38.1	240.4	1.8	2.1	6.8
JM3-225S-8	18.5	25	740	90.1	90.1	87.4	0.75	41.6	39.5	38.1	238.8	1.8	2.1	6.8
JM3-225M1-8	22	30	740	90.6	90.6	87.9	0.76	48.5	46.1	44.5	283.9	1.8	2.1	6.9
JM3-225M2-8	30	40	740	91.3	91.3	88.6	0.78	64.0	60.8	58.6	387.2	1.8	2.1	6.6
JM3-250M1-8	30	40	740	91.3	91.3	88.6	0.78	64.0	60.8	58.6	387.2	1.8	2.1	6.6
JM3-250M2-8	37	50	740	91.8	91.8	89.0	0.79	77.5	73.6	71.0	477.5	1.8	2.1	6.7
JM3-280S-8	37	50	740	91.8	91.8	89.0	0.79	77.5	73.6	71.0	477.5	1.8	2.1	6.7
JM3-280M1-8	45	60	740	92.2	92.2	89.4	0.80	92.7	88.1	84.9	580.7	1.8	2.1	6.8
JM3-280M2-8	55	75	740	92.5	92.5	89.7	0.80	113	107	103	709.8	1.8	2.1	6.8
JM3-315S-8	55	75	745	92.5	92.5	89.7	0.80	113	107	103	705.0	1.8	2.1	6.8
JM3-315M-8	75	100	745	93.1	93.1	90.3	0.81	151	144	138	961.4	1.8	2.1	6.3
JM3-315L1-8	90	125	745	93.4	93.4	90.6	0.81	181	172	166	1153.7	1.8	2.1	6.3
JM3-315L2-8	110	150	745	93.7	93.7	90.9	0.82	218	207	199	1410.1	1.8	2.1	6.4
JM3-315L3-8	132	180	745	94.0	94.0	91.2	0.82	260	247	238	1692.1	1.8	2.1	6.5
JM3-355M1-8	132	180	745	94.0	94.0	91.2	0.82	260	247	238	1692.1	1.8	2.1	6.5
JM3-355M2-8	160	200	745	94.3	94.3	91.5	0.83	311	295	284	2051.0	1.8	2.1	6.6
JM3-355L1-8	200	270	745	94.6	94.6	91.8	0.83	387	368	354	2563.8	1.8	2.1	6.6
JM3-355L2-8	250	340	745	94.6	94.6	91.8	0.83	484	460	443	3204.7	1.8	2.1	6.6

JM1 IE2 技术参数 TECHNICAL DATA

SPEED 3000RPM 2-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM1-160M1-2	11	15	2935	89.4	89.4	86.7	0.88	21.2	20.2	19.5	35.8	1.7	2.2	7.0
JM1-160M2-2	15	20	2935	90.3	90.3	87.6	0.88	28.7	27.2	26.3	48.8	1.7	2.2	7.0
JM1-160L1-2	18.5	25	2935	90.9	90.9	88.2	0.89	34.7	33.0	31.8	60.2	1.8	2.2	7.0
JM1-160L2-2	22	30	2935	91.3	91.3	88.6	0.89	41.1	39.1	37.7	71.6	2.0	2.2	7.0
JM1-180M1-2	22	30	2940	91.3	91.3	88.6	0.89	41.1	39.1	37.7	71.5	2.0	2.2	7.0
JM1-180M2-2	30	40	2940	92.0	92.0	89.2	0.89	55.7	52.9	51.0	97.4	1.7	2.2	7.0
JM1-200L1-2	30	40	2955	92.0	92.0	89.2	0.89	55.7	52.9	51.0	97.0	1.7	2.2	7.0
JM1-200L2-2	37	50	2955	92.5	92.5	89.7	0.89	68.3	64.9	62.5	119.6	1.9	2.2	7.0
JM1-200L3-2	45	60	2955	92.9	92.9	90.1	0.89	82.7	78.6	75.7	145.4	1.9	2.2	7.0
JM1-225M1-2	45	60	2955	92.9	92.9	90.1	0.89	82.7	78.6	75.7	145.4	1.9	2.2	7.0
JM1-225M2-2	55	75	2955	93.2	93.2	90.4	0.89	101	95.7	92.2	177.7	1.9	2.2	7.0
JM1-250M1-2	55	75	2960	93.2	93.2	90.4	0.89	101	95.7	92.2	177.4	1.9	2.2	7.0
JM1-250M2-2	75	100	2960	93.8	93.8	91.0	0.89	136	130	125	242.0	1.8	2.2	6.7
JM1-280S-2	75	100	2965	93.8	93.8	91.0	0.89	136	130	125	241.6	1.8	2.2	6.7
JM1-280M1-2	90	125	2965	94.1	94.1	91.3	0.90	161	153	148	289.9	1.7	2.2	6.8
JM1-280M2-2	110	150	2965	94.3	94.3	91.5	0.90	197	187	180	354.3	1.7	2.2	6.8
JM1-315S-2	110	150	2970	94.3	94.3	91.5	0.90	197	187	180	353.7	1.7	2.2	6.8
JM1-315M-2	132	180	2970	94.6	94.6	91.8	0.90	236	224	216	424.4	1.6	2.2	6.8
JM1-315L1-2	160	200	2970	94.8	94.8	92.0	0.90	285	271	261	514.5	1.4	2.0	6.8
JM1-315L2-2	200	270	2970	95.0	95.0	92.2	0.90	355	338	325	643.1	1.4	2.0	6.8
JM1-315L3-2	250	340	2970	95.0	95.0	92.2	0.88	454	432	416	803.9	1.2	2.0	6.8
JM1-355M-2	250	340	2970	95.0	95.0	92.2	0.88	454	432	416	803.9	1.2	2.0	6.8
JM1-355L1-2	315	430	2970	95.0	95.0	92.2	0.89	566	538	518	1012.9	1.0	1.8	6.5
JM1-355L2-2	355	475	2970	95.0	95.0	92.2	0.89	638	606	584	1141.5	1.0	1.8	6.5
JM1-355L3-2	375	500	2970	95.0	95.0	92.2	0.89	674	640	617	1205.8	1.0	1.8	6.5

SPEED 1500RPM 4-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM1-160M-4	11	15	1460	89.8	89.8	87.1	0.85	21.9	20.8	20.0	72.0	1.9	2.2	7.0
JM1-160L1-4	15	20	1460	90.6	90.6	87.9	0.86	29.2	27.8	26.8	98.1	2.0	2.2	7.0
JM1-160L2-4	18.5	25	1460	91.2	91.2	88.5	0.86	35.8	34.0	32.8	121.0	2.0	2.2	7.0
JM1-180M-4	18.5	25	1465	91.2	91.2	88.5	0.86	35.8	34.0	32.8	120.6	2.0	2.2	7.0
JM1-180L1-4	22	30	1465	91.6	91.6	88.9	0.86	42.4	40.3	38.9	143.4	1.9	2.2	7.0
JM1-180L2-4	30	40	1465	92.3	92.3	89.5	0.87	56.8	53.9	52.0	195.6	1.9	2.2	7.0
JM1-200L1-4	30	40	1470	92.3	92.3	89.5	0.87	56.8	53.9	52.0	194.9	1.9	2.2	7.0
JM1-200L2-4	37	50	1470	92.7	92.7	89.9	0.87	69.7	66.2	63.8	240.4	2.0	2.2	7.0
JM1-225S-4	37	50	1475	92.7	92.7	89.9	0.87	69.7	66.2	63.8	239.6	2.0	2.2	7.0
JM1-225M1-4	45	60	1475	93.1	93.1	90.3	0.87	84.4	80.2	77.3	291.4	2.0	2.2	7.0
JM1-225M2-4	55	75	1475	93.5	93.5	90.7	0.88	102	96.5	93.0	356.1	1.8	2.2	7.0
JM1-250M1-4	55	75	1480	93.5	93.5	90.7	0.88	102	96.5	93.0	354.9	1.8	2.2	7.0
JM1-250M2-4	75	100	1480	94.0	94.0	91.2	0.88	138	131	126	484.0	2.0	2.2	6.7
JM1-280S-4	75	100	1480	94.0	94.0	91.2	0.88	138	131	126	484.0	2.0	2.2	6.7
JM1-280M1-4	90	125	1480	94.2	94.2	91.4	0.88	165	157	151	580.7	2.2	2.2	6.7
JM1-280M2-4	110	150	1480	94.5	94.5	91.7	0.88	201	191	184	709.8	1.7	2.2	6.7
JM1-315S-4	110	150	1485	94.5	94.5	91.7	0.88	201	191	184	707.4	1.7	2.2	6.7
JM1-315M-4	132	180	1485	94.7	94.7	91.9	0.88	241	229	220	848.9	1.8	2.2	6.8
JM1-315L1-4	160	200	1485	94.9	94.9	92.1	0.88	291	277	267	1029.0	1.4	2.0	6.8
JM1-315L2-4	200	270	1485	95.1	95.1	92.2	0.88	363	345	332	1286.2	1.4	2.0	6.8
JM1-315L3-4	250	340	1485	95.1	95.1	92.2	0.88	454	431	416	1607.7	1.2	2.0	6.8
JM1-355M-4	250	340	1485	95.1	95.1	92.2	0.88	454	431	416	1607.7	1.2	2.0	6.8
JM1-355L1-4	315	430	1485	95.1	95.1	92.2	0.90	559	531	512	2025.8	1.0	1.8	6.5
JM1-355L2-4	355	475	1485	95.1	95.1	92.2	0.90	630	599	577	2283.0	1.0	1.8	6.5
JM1-355L3-4	375	500	1485	95.1	95.1	92.2	0.90	666	632	610	2411.6	1.0	1.8	6.5

JM1 IE2 技术参数 TECHNICAL DATA

SPEED 1000RPM 6-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM1-160M-6	7.5	10	965	87.2	87.2	84.6	0.79	16.5	15.7	15.1	74.2	2.0	2.0	6.5
JM1-160L-6	11	15	965	88.7	88.7	86.0	0.78	24.2	22.9	22.1	108.9	2.0	2.0	6.5
JM1-180L1-6	15	20	970	89.7	89.7	87.0	0.81	31.4	29.8	28.7	147.7	1.8	2.0	6.5
JM1-180L2-6	18.5	25	970	90.4	90.4	87.7	0.83	37.5	35.6	34.3	182.1	1.8	2.0	6.5
JM1-200L1-6	18.5	25	975	90.4	90.4	87.7	0.83	37.5	35.6	34.3	181.2	1.8	2.0	6.5
JM1-200L2-6	22	30	975	90.9	90.9	88.2	0.85	43.3	41.1	39.6	215.5	1.7	2.0	6.5
JM1-200L3-6	30	40	975	91.7	91.7	88.9	0.85	58.5	55.6	53.5	293.8	1.7	2.0	6.5
JM1-225M1-6	30	40	975	91.7	91.7	88.9	0.85	58.5	55.6	53.5	293.8	1.7	2.0	6.5
JM1-225M2-6	37	50	975	92.2	92.2	89.4	0.87	70.1	66.6	64.2	362.4	1.8	2.0	6.5
JM1-250M1-6	37	50	975	92.2	92.2	89.4	0.87	70.1	66.6	64.2	362.4	1.8	2.0	6.5
JM1-250M2-6	45	60	975	92.7	92.7	89.9	0.86	85.8	81.5	78.5	440.8	1.8	2.0	6.5
JM1-280S-6	45	60	980	92.7	92.7	89.9	0.86	85.8	81.5	78.5	438.5	1.8	2.0	6.5
JM1-280M1-6	55	75	980	93.1	93.1	90.3	0.87	103	98.0	94.5	536.0	1.8	2.0	6.5
JM1-280M2-6	75	100	980	93.7	93.7	90.9	0.87	140	133	128	730.9	1.8	2.0	6.5
JM1-315S-6	75	100	980	93.7	93.7	90.9	0.87	140	133	128	730.9	1.8	2.0	6.5
JM1-315M-6	90	125	980	94.0	94.0	91.2	0.88	165	157	151	877.0	1.8	2.0	6.5
JM1-315L1-6	110	150	980	94.3	94.3	91.5	0.87	204	194	187	1071.9	1.3	1.8	6.5
JM1-315L2-6	132	180	980	94.6	94.6	91.8	0.87	244	231	223	1286.3	1.3	1.8	6.5
JM1-315L3-6	160	200	980	94.8	94.8	92.0	0.87	295	280	270	1559.2	1.3	1.8	6.5
JM1-355M1-6	160	200	980	94.8	94.8	92.0	0.87	295	280	270	1559.2	1.3	1.8	6.5
JM1-355M2-6	200	270	980	95.0	95.0	92.2	0.87	368	349	337	1949.0	1.1	1.8	6.0
JM1-355L1-6	250	340	980	95.0	95.0	92.2	0.88	454	432	416	2436.2	1.1	1.8	6.0
JM1-355L2-6	315	430	980	95.0	95.0	92.2	0.88	572	544	524	3069.6	1.1	1.8	6.0

SPEED 750RPM 8-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE2)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM1-160M1-8	4	5.5	725	81.9	81.9	79.4	0.73	10.2	9.66	9.31	52.7	2.0	2.0	6.0
JM1-160M2-8	5.5	7.5	725	83.8	83.8	81.3	0.73	13.7	13.0	12.5	72.4	2.0	2.0	6.0
JM1-160L-8	7.5	10	725	85.3	85.3	82.7	0.73	18.3	17.4	16.8	98.8	2.0	2.0	6.0
JM1-180L1-8	11	15	730	86.9	86.9	84.3	0.74	26.0	24.7	23.8	143.9	1.8	2.0	6.0
JM1-180L2-8	15	20	730	88.0	88.0	85.4	0.76	34.1	32.4	31.2	196.2	1.8	2.0	6.0
JM1-200L1-8	15	20	730	88.0	88.0	85.4	0.76	34.1	32.4	31.2	196.2	1.8	2.0	6.0
JM1-200L2-8	18.5	25	730	88.6	88.6	85.9	0.78	40.7	38.6	37.2	242.0	1.7	2.0	6.0
JM1-225S-8	18.5	25	735	88.6	88.6	85.9	0.78	40.7	38.6	37.2	240.4	1.7	2.0	6.0
JM1-225M1-8	22	30	735	89.1	89.1	86.4	0.78	48.1	45.7	44.0	285.9	1.8	2.0	6.0
JM1-225M2-8	30	40	735	89.8	89.8	87.1	0.81	62.7	59.5	57.4	389.8	1.7	2.0	6.0
JM1-250M1-8	30	40	735	89.8	89.8	87.1	0.81	62.7	59.5	57.4	389.8	1.7	2.0	6.0
JM1-250M2-8	37	50	735	90.3	90.3	87.6	0.80	77.8	73.9	71.3	480.7	1.6	2.0	6.0
JM1-280S-8	37	50	735	90.3	90.3	87.6	0.80	77.8	73.9	71.3	480.7	1.6	2.0	6.0
JM1-280M1-8	45	60	735	90.7	90.7	88.0	0.80	94.2	89.5	86.3	584.7	1.8	2.0	6.0
JM1-280M2-8	55	75	735	91.0	91.0	88.3	0.80	115	109	105	714.6	1.8	2.0	6.0
JM1-315S-8	55	75	740	91.0	91.0	88.3	0.80	115	109	105	709.8	1.8	2.0	6.0
JM1-315M-8	75	100	740	91.6	91.6	88.9	0.81	154	146	141	967.9	1.8	2.0	6.0
JM1-315L1-8	90	125	740	91.9	91.9	89.1	0.81	184	175	168	1161.5	1.3	1.8	6.0
JM1-315L2-8	110	150	740	92.3	92.3	89.5	0.81	224	212	205	1419.6	1.3	1.8	6.0
JM1-315L3-8	132	180	740	92.6	92.6	89.8	0.81	267	254	245	1703.5	1.3	1.8	6.0
JM1-355M1-8	132	180	740	92.6	92.6	89.8	0.81	267	254	245	1703.5	1.3	1.8	6.0
JM1-355M2-8	160	200	740	93.0	93.0	90.2	0.81	323	307	295	2064.9	1.1	1.8	5.5
JM1-355L1-8	200	270	740	93.5	93.5	90.7	0.81	401	381	367	2581.1	1.1	1.8	5.5
JM1-355L2-8	250	340	740	93.5	93.5	90.7	0.79	514	489	471	3226.4	1.1	1.8	5.5

JM IE1 技术参数 TECHNICAL DATA

SPEED 3000RPM 2-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE1)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM-160M1-2	11	15	2925	87.6	87.6	85.0	0.88	21.7	20.6	19.9	35.9	1.7	2.2	7.0
JM-160M2-2	15	20	2925	88.7	88.7	86.0	0.88	29.2	27.7	26.7	49.0	1.7	2.2	7.0
JM-160L1-2	18.5	25	2925	89.3	89.3	86.6	0.89	35.4	33.6	32.4	60.4	1.8	2.2	7.0
JM-160L2-2	22	30	2925	89.9	89.9	87.2	0.89	41.8	39.7	38.3	71.8	2.0	2.2	7.0
JM-180M1-2	22	30	2930	89.9	89.9	87.2	0.89	41.8	39.7	38.3	71.7	2.0	2.2	7.0
JM-180M2-2	30	40	2930	90.7	90.7	88.0	0.89	56.5	53.6	51.7	97.8	1.7	2.2	7.0
JM-200L1-2	30	40	2945	90.7	90.7	88.0	0.89	56.5	53.6	51.7	97.3	1.7	2.2	7.0
JM-200L2-2	37	50	2945	91.2	91.2	88.5	0.89	69.3	65.8	63.4	120.0	1.9	2.2	7.0
JM-200L3-2	45	60	2945	91.7	91.7	88.9	0.89	83.8	79.6	76.7	145.9	1.9	2.2	7.0
JM-225M1-2	45	60	2945	91.7	91.7	88.9	0.89	83.8	79.6	76.7	145.9	1.9	2.2	7.0
JM-225M2-2	55	75	2945	92.1	92.1	89.3	0.89	102	96.8	93.3	178.4	1.9	2.2	7.0
JM-250M1-2	55	75	2950	92.1	92.1	89.3	0.89	102	96.8	93.3	178.1	1.9	2.2	7.0
JM-250M2-2	75	100	2950	92.7	92.7	89.9	0.89	138	131	126	242.8	1.8	2.2	6.7
JM-280S-2	75	100	2960	92.7	92.7	89.9	0.89	138	131	126	242.0	1.8	2.2	6.7
JM-280M1-2	90	125	2960	93.0	93.0	90.2	0.90	163	155	150	290.4	1.7	2.2	6.8
JM-280M2-2	110	150	2960	93.3	93.3	90.5	0.90	199	189	182	354.9	1.7	2.2	6.8
JM-315S-2	110	150	2965	93.3	93.3	90.5	0.90	199	189	182	354.3	1.7	2.2	6.8
JM-315M-2	132	180	2965	93.5	93.5	90.7	0.90	238	226	218	425.2	1.6	2.2	6.8
JM-315L1-2	160	200	2965	93.8	93.8	91.0	0.90	288	274	264	515.3	1.4	2.0	6.8
JM-315L2-2	200	270	2965	94.0	94.0	91.2	0.90	359	341	329	644.2	1.4	2.0	6.8
JM-315L3-2	250	340	2965	94.0	94.0	91.2	0.88	459	436	420	805.2	1.2	2.0	6.8
JM-355M-2	250	340	2970	94.0	94.0	91.2	0.88	459	436	420	803.9	1.2	2.0	6.8
JM-355L1-2	315	430	2970	94.0	94.0	91.2	0.89	572	543	524	1012.9	1.0	1.8	6.5
JM-355L2-2	355	475	2970	94.0	94.0	91.2	0.89	645	612	590	1141.5	1.0	1.8	6.5
JM-355L3-2	375	500	2970	94.0	94.0	91.2	0.89	681	647	624	1205.8	1.0	1.8	6.5

SPEED 1500RPM 4-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE1)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM-160M-4	11	15	1450	87.6	87.6	85.0	0.85	22.4	21.3	20.6	72.4	1.9	2.2	7.0
JM-160L1-4	15	20	1450	88.7	88.7	86.0	0.86	29.9	28.4	27.4	98.8	2.0	2.2	7.0
JM-160L2-4	18.5	25	1450	89.3	89.3	86.6	0.86	36.6	34.8	33.5	121.8	2.0	2.2	7.0
JM-180M-4	18.5	25	1460	89.3	89.3	86.6	0.86	36.6	34.8	33.5	121.0	2.0	2.2	7.0
JM-180L1-4	22	30	1460	89.9	89.9	87.2	0.86	43.2	41.1	39.6	143.9	1.9	2.2	7.0
JM-180L2-4	30	40	1460	90.7	90.7	88.0	0.87	57.8	54.9	52.9	196.2	1.9	2.2	7.0
JM-200L1-4	30	40	1465	90.7	90.7	88.0	0.87	57.8	54.9	52.9	195.6	1.9	2.2	7.0
JM-200L2-4	37	50	1465	91.2	91.2	88.5	0.87	70.9	67.3	64.9	241.2	2.0	2.2	7.0
JM-225S-4	37	50	1470	91.2	91.2	88.5	0.87	70.9	67.3	64.9	240.4	2.0	2.2	7.0
JM-225M1-4	45	60	1470	91.7	91.7	88.9	0.87	85.7	81.4	78.5	292.3	2.0	2.2	7.0
JM-225M2-4	55	75	1470	92.1	92.1	89.3	0.88	103	97.9	94.4	357.3	1.8	2.2	7.0
JM-250M1-4	55	75	1475	92.1	92.1	89.3	0.88	103	97.9	94.4	356.1	1.8	2.2	7.0
JM-250M2-4	75	100	1475	92.7	92.7	89.9	0.88	140	133	128	485.6	2.0	2.2	6.7
JM-280S-4	75	100	1475	92.7	92.7	89.9	0.88	140	133	128	485.6	2.0	2.2	6.7
JM-280M1-4	90	125	1475	93.0	93.0	90.2	0.88	167	159	153	582.7	2.2	2.2	6.7
JM-280M2-4	110	150	1475	93.3	93.3	90.5	0.88	204	193	186	712.2	1.7	2.2	6.7
JM-315S-4	110	150	1480	93.3	93.3	90.5	0.88	204	193	186	709.8	1.7	2.2	6.7
JM-315M-4	132	180	1480	93.5	93.5	90.7	0.88	244	232	223	851.8	1.8	2.2	6.8
JM-315L1-4	160	200	1480	93.8	93.8	91.0	0.88	295	280	270	1032.4	1.4	2.0	6.8
JM-315L2-4	200	270	1480	94.0	94.0	91.2	0.88	367	349	336	1290.5	1.4	2.0	6.8
JM-315L3-4	250	340	1480	94.0	94.0	91.2	0.88	459	436	420	1613.2	1.2	2.0	6.8
JM-355M-4	250	340	1480	94.0	94.0	91.2	0.88	459	436	420	1613.2	1.2	2.0	6.8
JM-355L1-4	315	430	1480	94.0	94.0	91.2	0.90	566	537	518	2032.6	1.0	1.8	6.5
JM-355L2-4	355	475	1480	94.0	94.0	91.2	0.90	638	606	584	2290.7	1.0	1.8	6.5
JM-355L3-4	375	500	1480	94.0	94.0	91.2	0.90	673	640	617	2419.8	1.0	1.8	6.5

JM IE1 技术参数 TECHNICAL DATA

SPEED 1000RPM 6-POLE 50HZ


型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE1)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM-160M-6	7.5	10	960	84.7	84.7	82.2	0.79	17.0	16.2	15.6	74.6	2.0	2.0	6.5
JM-160L-6	11	15	960	86.4	86.4	83.8	0.78	24.8	23.6	22.7	109.4	2.0	2.0	6.5
JM-180L1-6	15	20	965	87.7	87.7	85.1	0.81	32.1	30.5	29.4	148.4	1.8	2.0	6.5
JM-180L2-6	18.5	25	965	88.6	88.6	85.9	0.83	38.2	36.3	35.0	183.1	1.8	2.0	6.5
JM-200L1-6	18.5	25	970	88.6	88.6	85.9	0.83	38.2	36.3	35.0	182.1	1.8	2.0	6.5
JM-200L2-6	22	30	970	89.2	89.2	86.5	0.85	44.1	41.9	40.4	216.6	1.7	2.0	6.5
JM-200L3-6	30	40	970	90.2	90.2	87.5	0.85	59.4	56.5	54.4	295.4	1.7	2.0	6.5
JM-225M1-6	30	40	970	90.2	90.2	87.5	0.85	59.4	56.5	54.4	295.4	1.7	2.0	6.5
JM-225M2-6	37	50	970	90.8	90.8	88.1	0.87	71.2	67.6	65.2	364.3	1.8	2.0	6.5
JM-250M1-6	37	50	970	90.8	90.8	88.1	0.87	71.2	67.6	65.2	364.3	1.8	2.0	6.5
JM-250M2-6	45	60	970	91.4	91.4	88.7	0.86	87.0	82.6	79.6	443.0	1.8	2.0	6.5
JM-280S-6	45	60	975	91.4	91.4	88.7	0.86	87.0	82.6	79.6	440.8	1.8	2.0	6.5
JM-280M1-6	55	75	975	91.9	91.9	89.1	0.87	105	99.3	95.7	538.7	1.8	2.0	6.5
JM-280M2-6	75	100	975	92.6	92.6	89.8	0.87	141	134	130	734.6	1.8	2.0	6.5
JM-315S-6	75	100	975	92.6	92.6	89.8	0.87	141	134	130	734.6	1.8	2.0	6.5
JM-315M-6	90	125	975	92.9	92.9	90.1	0.88	167	159	153	881.5	1.8	2.0	6.5
JM-315L1-6	110	150	975	93.3	93.3	90.5	0.87	206	196	189	1077.4	1.3	1.8	6.5
JM-315L2-6	132	180	975	93.5	93.5	90.7	0.87	247	234	226	1292.9	1.3	1.8	6.5
JM-315L3-6	160	200	975	93.8	93.8	91.0	0.87	298	283	273	1567.2	1.3	1.8	6.5
JM-355M1-6	160	200	980	93.8	93.8	91.0	0.87	298	283	273	1559.2	1.3	1.8	6.5
JM-355M2-6	200	270	980	94.0	94.0	91.2	0.87	372	353	340	1949.0	1.1	1.8	6.0
JM-355L1-6	250	340	980	94.0	94.0	91.2	0.88	459	436	420	2436.2	1.1	1.8	6.0
JM-355L2-6	315	430	980	94.0	94.0	91.2	0.88	579	550	530	3069.6	1.1	1.8	6.0

SPEED 750RPM 8-POLE 50HZ

型号 Type	额定功率 Rated Output		额定 转速 Rated Speed rpm	效率 Efficiency η % (IE1)	效率 75%负载 Efficiency at 75% load	效率 50%负载 Efficiency at 50% load	功率 因数 Power factor $\cos\Phi$	额定电流 Rated current A			额定 转矩 Rated Torque Nm	堵转转矩/ 额定转矩 Ts/Tn	最大转矩/ 额定转矩 Tmax/Tn	堵转电流/ 额定电流 Is/In
	kW	HP						380V	400V	415V				
JM-160M1-8	4	5.5	720	79.2	79.2	76.8	0.73	10.5	9.99	9.63	53.1	2.0	2.0	6.0
JM-160M2-8	5.5	7.5	720	81.4	81.4	79.0	0.73	14.1	13.4	12.9	73.0	2.0	2.0	6.0
JM-160L-8	7.5	10	720	83.1	83.1	80.6	0.73	18.8	17.8	17.2	99.5	2.0	2.0	6.0
JM-180L1-8	11	15	725	85.0	85.0	82.5	0.74	26.6	25.2	24.3	144.9	1.8	2.0	6.0
JM-180L2-8	15	20	725	86.2	86.2	83.6	0.76	34.8	33.0	31.9	197.6	1.8	2.0	6.0
JM-200L1-8	15	20	725	86.2	86.2	83.6	0.76	34.8	33.0	31.9	197.6	1.8	2.0	6.0
JM-200L2-8	18.5	25	725	86.9	86.9	84.3	0.78	41.5	39.4	38.0	243.7	1.7	2.0	6.0
JM-225S-8	18.5	25	730	86.9	86.9	84.3	0.78	41.5	39.4	38.0	242.0	1.7	2.0	6.0
JM-225M1-8	22	30	730	87.4	87.4	84.8	0.78	49.0	46.6	44.9	287.8	1.8	2.0	6.0
JM-225M2-8	30	40	730	88.3	88.3	85.7	0.81	63.7	60.5	58.4	392.5	1.7	2.0	6.0
JM-250M1-8	30	40	730	88.3	88.3	85.7	0.81	63.7	60.5	58.4	392.5	1.7	2.0	6.0
JM-250M2-8	37	50	730	88.8	88.8	86.1	0.80	79.1	75.2	72.5	484.0	1.6	2.0	6.0
JM-280S-8	37	50	730	88.8	88.8	86.1	0.80	79.1	75.2	72.5	484.0	1.6	2.0	6.0
JM-280M1-8	45	60	730	89.2	89.2	86.5	0.80	95.8	91	87.7	588.7	1.8	2.0	6.0
JM-280M2-8	55	75	730	89.7	89.7	87.0	0.80	116	111	107	719.5	1.8	2.0	6.0
JM-315S-8	55	75	735	89.7	89.7	87.0	0.80	116	111	107	714.6	1.8	2.0	6.0
JM-315M-8	75	100	735	90.3	90.3	87.6	0.81	156	148	143	974.5	1.8	2.0	6.0
JM-315L1-8	90	125	735	90.7	90.7	88.0	0.81	186	177	170	1169.4	1.3	1.8	6.0
JM-315L2-8	110	150	735	91.1	91.1	88.4	0.81	226	215	207	1429.3	1.3	1.8	6.0
JM-315L3-8	132	180	735	91.5	91.5	88.8	0.81	271	257	248	1715.1	1.3	1.8	6.0
JM-355M1-8	132	180	740	91.5	91.5	88.8	0.81	271	257	248	1703.5	1.3	1.8	6.0
JM-355M2-8	160	200	740	91.9	91.9	89.1	0.81	327	310	299	2064.9	1.1	1.8	5.5
JM-355L1-8	200	270	740	92.5	92.5	89.7	0.81	406	385	371	2581.1	1.1	1.8	5.5
JM-355L2-8	250	340	740	92.5	92.5	89.7	0.79	520	494	476	3226.4	1.1	1.8	5.5

安装及外型尺寸 MOUNTING AND OVERALL DIMENSIONS

IM B3 H160-355

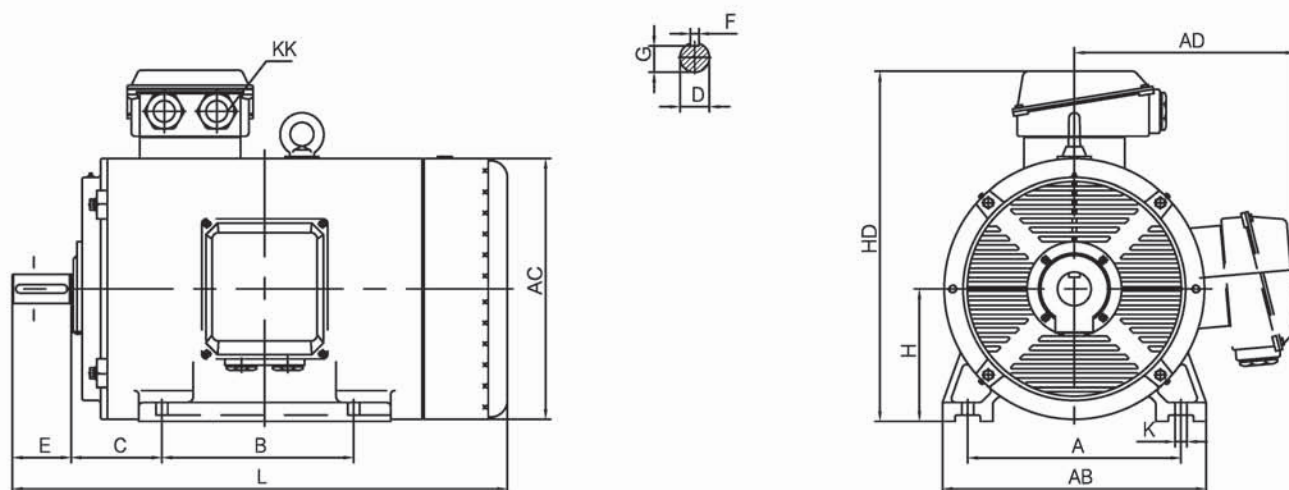

型号 Type	极数 Pole	A	AB	AC	AD	B	C	D	E	EB	ED	F	G	H	K	KK	L
160M	2,4,6,8	254	330	380	290	210	108	48	110	90	10	14	42.5	160	4- Φ 14.5	2-M40X1.5	676
160L	2,4,6,8	254	330	380	290	254	108	48	110	90	10	14	42.5	160	4- Φ 14.5	2-M40X1.5	676
180M	2,4	279	350	420	325	241	121	55	110	90	10	16	49	180	4- Φ 14.5	2-M40X1.5	726
180L	4,6,8	279	350	420	325	279	121	55	110	90	10	16	49	180	4- Φ 14.5	2-M40X1.5	726
200L	2,4,6,8	318	400	465	350	305	133	60	140	100	5	18	53	200	4- Φ 18.5	2-M50X1.5	886
225S	4,8	356	450	520	395	286	149	65	140	125	7.5	18	58	225	4- Φ 18.5	2-M50X1.5	880
225M	2	356	450	520	395	311	149	60	140	100	5	18	53	225	4- Φ 18.5	2-M50X1.5	880
225M	4,6,8	356	450	520	395	311	149	65	140	125	7.5	20	58	225	4- Φ 18.5	2-M50X1.5	880
250M	2	406	510	550	410	349	168	65	140	125	7.5	18	58	250	4- Φ 24	2-M63X1.5	960
250M	4,6,8	406	510	550	410	349	168	75	140	125	7.5	20	67.5	250	4- Φ 24	2-M63X1.5	960
280S	2	457	570	610	485	368	190	65	140	125	7.5	18	58	280	4- Φ 24	2-M63X1.5	1090
280S	4,6,8	457	570	610	485	368	190	80	170	125	7.5	22	71	280	4- Φ 24	2-M63X1.5	1140
280M	2	457	570	610	485	419	190	65	140	125	7.5	18	58	280	4- Φ 24	2-M63X1.5	1090
280M	4,6,8	457	570	610	485	419	190	80	170	125	7.5	22	71	280	4- Φ 24	2-M63X1.5	1140
315S	2	508	630	792	586	406	216	70	140	125	7.5	20	62.5	315	4- Φ 28	2-M63X1.5	1130
315S	4,6,8	508	630	792	586	406	216	90	170	160	5	25	81	315	4- Φ 28	2-M63X1.5	1160
315M	2	508	630	792	586	457	216	70	140	125	7.5	20	62.5	315	4- Φ 28	2-M63X1.5	1240
315M	4,6,8	508	630	792	586	457	216	90	170	160	5	25	81	315	4- Φ 28	2-M63X1.5	1270
315L	2	508	630	792	586	508	216	70	140	125	7.5	20	62.5	315	4- Φ 28	2-M63X1.5	1240
315L	4,6,8	508	630	792	586	508	216	90	170	160	5	25	81	315	4- Φ 28	2-M63X1.5	1270
355M	2	610	710	980	630	560	254	75	140	130	5	20	67.5	355	4- Φ 28	2-M63X1.5	1550
355M	4,6,8	610	710	980	630	560	254	100	210	160	5	28	90	355	4- Φ 28	2-M63X1.5	1620
355L	2	610	710	980	630	630	254	75	140	130	5	20	67.5	355	4- Φ 28	2-M63X1.5	1620
355L	4,6,8	610	710	980	630	630	254	100	210	160	5	28	90	355	4- Φ 28	2-M63X1.5	1690